
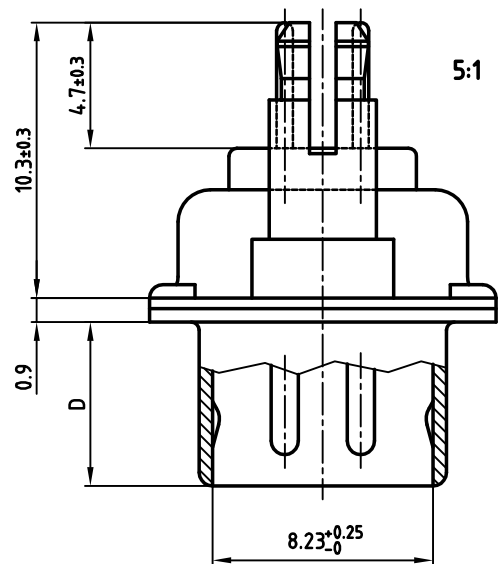

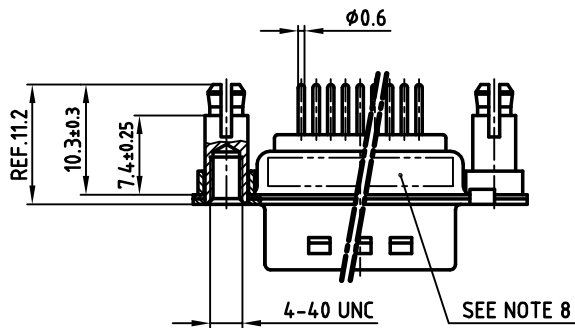


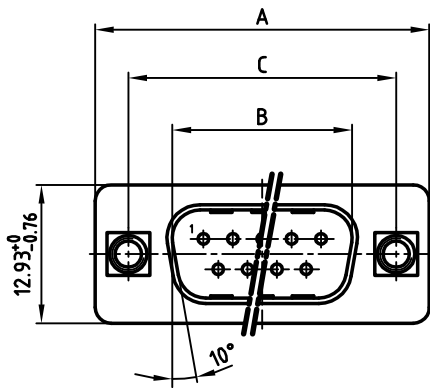

No. of Pos.	A -0.76	B +0.25	C	D -0.3	Part No.
9	31.19	16.79	25.00 ^{+0.12} / _{-0.13}	6.12	163A16159X
15	39.52	25.12	33.30 ^{+0.15} / _{-0.1}	6.12	163A16169X
25	53.42	38.84	47.04 ±0.13	5.99	163A16179X
37	69.70	55.30	63.50 ±0.13	5.99	163A16189X

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
- THREADED SPACER CLIP: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6mm
- COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: **PART-NO. CONEC Y/WW**

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
2003	date	name	
drawn	04.11.	Lehmenkühler	
appd.	04.11.	Mickenbecker	
norm	DIN 41652		
d-old			

CONEC

tolerance	dim. in mm	scale:	2:1 (5:1)
		material:	SEE NOTES
		title:	
		D-SUB MALE	
		9-37pos. PIN VERSION	
		with threaded spacer clip	
		dwg no:	AutoCAD 2000
		16K1A1045	
		part no: SEE TABLE	