


used for: D-SUB

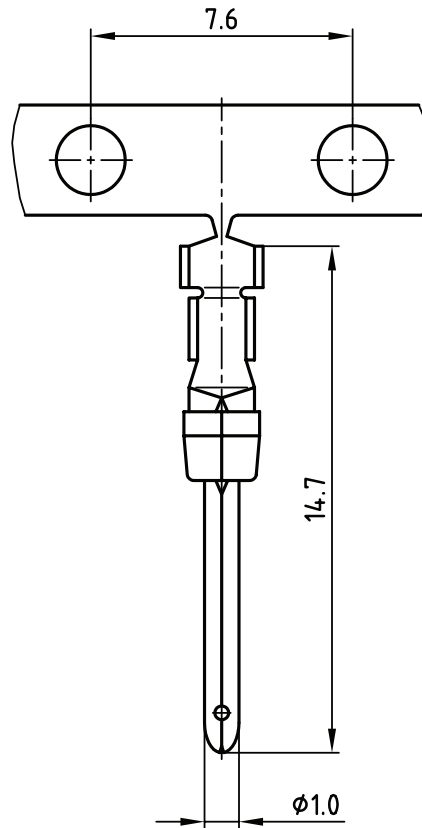

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

NOTES:

Material: phosphor bronze

Finish: min. 8µ" hard-gold-plated in the contact area

Temperature range: -55°C to +125°C

Rated current: 7.5A


Contact resistance: ≤ 10mΩ

Length of reel - little spool: 500 contacts

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance



scale:

5:1

material:

SEE NOTES

title:

PLUG CONTACT
CRIMP AWG24-20
(little spool wheeled left)

dwg no:

AutoCAD 2004

DIN-A

16K1A1145

4

sh: 1/1

part no:

161A13389X