


used for: D-SUB

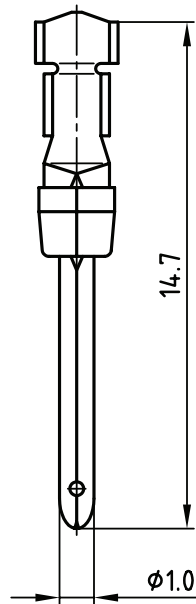

NOTES:

Material stamped Contacts: phosphor bronze

Finish: min. 8µ" hard-gold-plated in the contact area

Temperature range: -55°C to +125°C

Rated current: 7.5A

Test voltage: 1000V eff. at 50Hz

Contact resistance: ≤ 10mOhm


Insulation resistance: ≥ 5000MOhm

Directive 2002/95/EC
„RoHS“
Compliant

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

tolerance



scale: 5:1

material: SEE NOTES

2002	date	name
drawn	11.01.	Parei
appd.	11.01.	Resonnek
norm		
d-old		

title:

PLUG CONTACT
CRIMP
AWG24-20

dwg no:

AutoCAD 2000

DIN-A

16K2A430A

4
sh: 1/1

part no:

161A13399X

CONEC®