




used for: D-SUB



Wire size AWG	Crimp height A
28	0,61 - 0,76
26	0,66 - 0,81
24	0,66 - 0,86

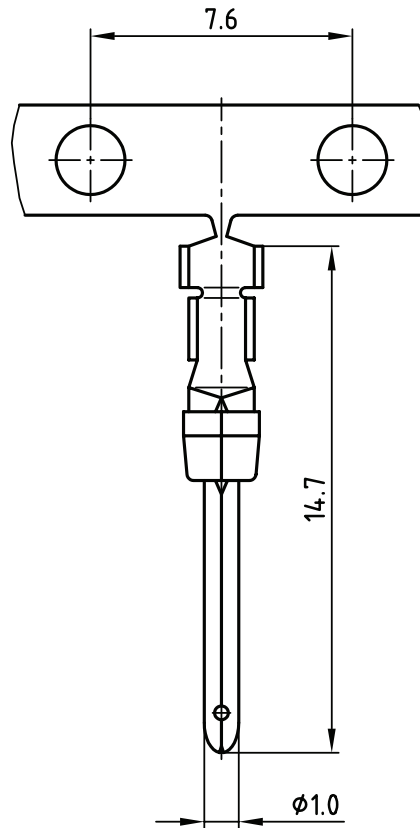

STRIPPING DIMENSIONS



Directive 2002/95/EC
„RoHS“
Compliant

NOTES:

Material: phosphor bronze

Finish: 8pin hard-gold-plated in the contact area

Temperature range: -55°C to +125°C

Rated current: 5.0A


Contact resistance: ≤ 10mΩ

Crimping: use crimp tool 360X10079X

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

finish:
see notes

tolerance



scale: 5:1

material: see notes

				2008	date	name
				drawn	25.01.	Schmidt
				appd.	25.01.	Mickenbecker
				norm		
				d-old		

title:

PLUG CONTACT
CRIMP AWG 28 - 24
(big spool wheeled left)

dwg no: AutoCAD 2006 DIN-A

16K1A2236

4
sh: 1/1

part no: 161A13409X

CONEC[®]

rev.	description	date	name
------	-------------	------	------