

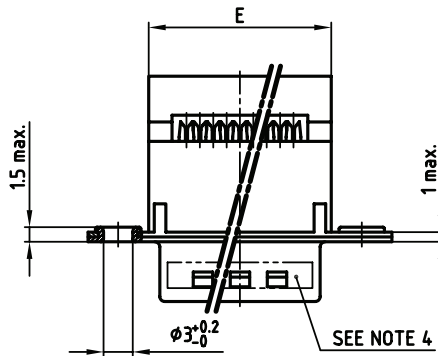


used for: D-SUB FLAT CABLE SYSTEM

POS.	A _{-0.76}	B _{+0.25}	C	D _{-0.3}	E _{-0.1}	F _{±0.5}	Part No.
9	31.19	16.79	25.00 ^{+0.12} _{-0.13}	6.12	18.73	23.2	161A13499X
15	39.52	25.12	33.30 ^{+0.15} _{-0.1}	6.12	26.86	22.5	161A13509X
25	53.42	38.84	47.04 ^{+0.13}	5.99	40.78	23.2	161A13519X
37	69.70	55.30	63.50 ^{+0.13}	5.99	57.04	22.5	161A13529X

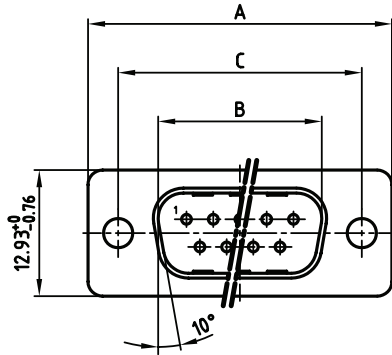

DIMENSION WITH UPPER
PART PRE-PRESSED

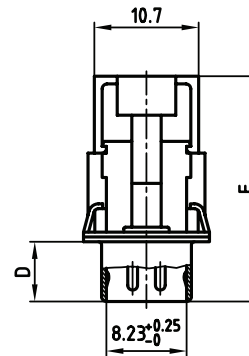

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, GREY
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
- CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW



APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH. DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance	dim. in mm
2003	date
drawn	26.06. Lehmenkühler
appd.	26.06. Mickenbecker
norm	DIN 41651
d-old	

scale: 2:1	
material: SEE NOTES	
title: D-SUB PLUG CONNECTOR FOR FLAT CABLE IDC 9-37pos.	
dwg no: AutoCAD 2000	DIN-A 3
16K1A974	
sh: 1/1	
part no: SEE TABLE	

