

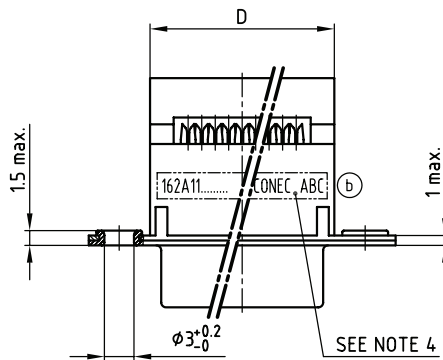


used for: D-SUB FLAT CABLE SYSTEM

POS.	A -0.76	B -0.25	C	D -0.1	E max.	Part No.
9	31.19	16.46	25.00 $\begin{smallmatrix} +0.12 \\ -0.13 \end{smallmatrix}$	18.73	23.3	162A11899X
15	39.52	24.79	33.30 $\begin{smallmatrix} +0.15 \\ -0.1 \end{smallmatrix}$	26.86	22.6	162A11909X
25	53.42	38.50	47.04 ± 0.13	40.78	23.3	162A11919X
37	69.70	54.96	63.50 ± 0.13	57.04	22.6	162A11929X

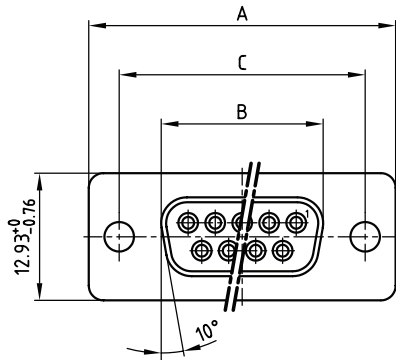

DIMENSION WITH UPPER
PART PRE-PRESSED

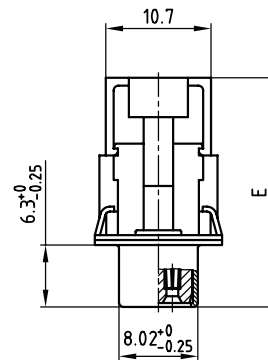

NOTES:

- METALSHELLS: STEEL; min. 320µm TIN
- INSULATORS: PBT GF UL 94 V-0; GREY
- CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD OVER min. 50µm NICKEL
- CONNECTOR IS PART MARKED: **PART-NO. CONEC ABC**

Directive 2002/95 EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACON	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

1 x b	Ä 3603	17.03.2010	Lehmen
a	Origin		
rev.	description	date	name

tolerance	dim. in mm
2003	date
drawn	26.06. Lehmenkühler
appd.	26.06. Mickenbecker
norm	DIN 41651
d-old	

CONEC

scale:	2:1
material:	SEE NOTES
title: D-SUB SOCKET CONNECTOR FOR FLAT CABLE IDC 9-37pos.	
dwg no:	AutoCAD 2000
16K1A973	
part no:	SEE TABLE

DIN-A
3
sh:1/1