
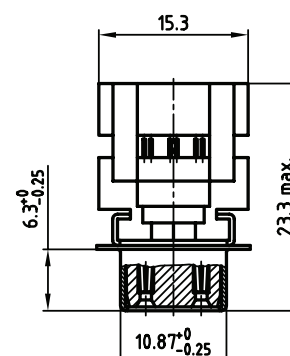
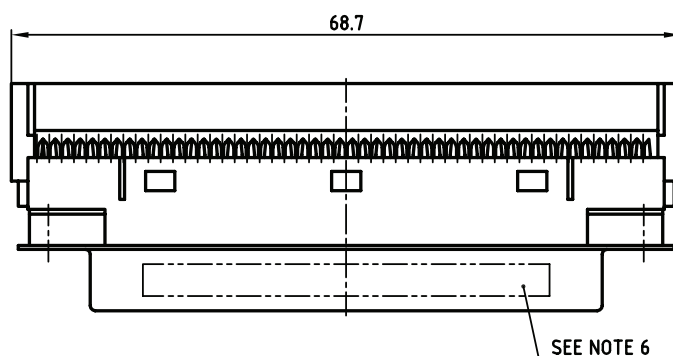


used for:	D-SUB IDC
-----------	-----------

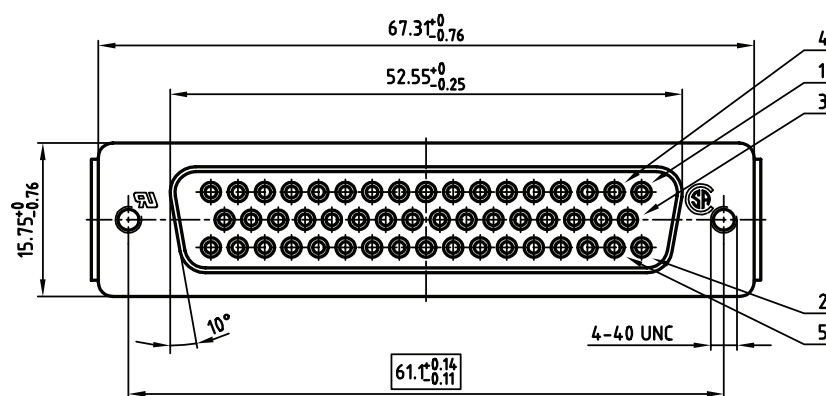

NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, GREY
3. CONTACTS: COPPER ALLOY
PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
5. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
6. CONNECTOR IS PART MARKED: 162A11939X CONEC Y/WW
7. = CRITICAL DIMENSION

APPROVAL # FREIGABE # DEBLOCKAGE # AUTORISATION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTORISATION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTORISATION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTORISATION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

rev.	description	date	name

tolerance		
2002	date	name
drawn	28.06.	Parei
appd.	28.06.	E. Mickenbecker
norm	DIN 4 1651	
d-old		



scale:	2:1	
material:	SEE NOTES	
title:	D-SUB IDC-FEMALE 50pos. for flat cable IDC	
dwg no:	AutoCAD 2000	DIN-A
16K2A613		3
part no:	162A11939X	