




D-Subminiature connector for flat cable IDC socket connector (industrial version)

Directive 2002/95/EC
"RoHS"
Compliant

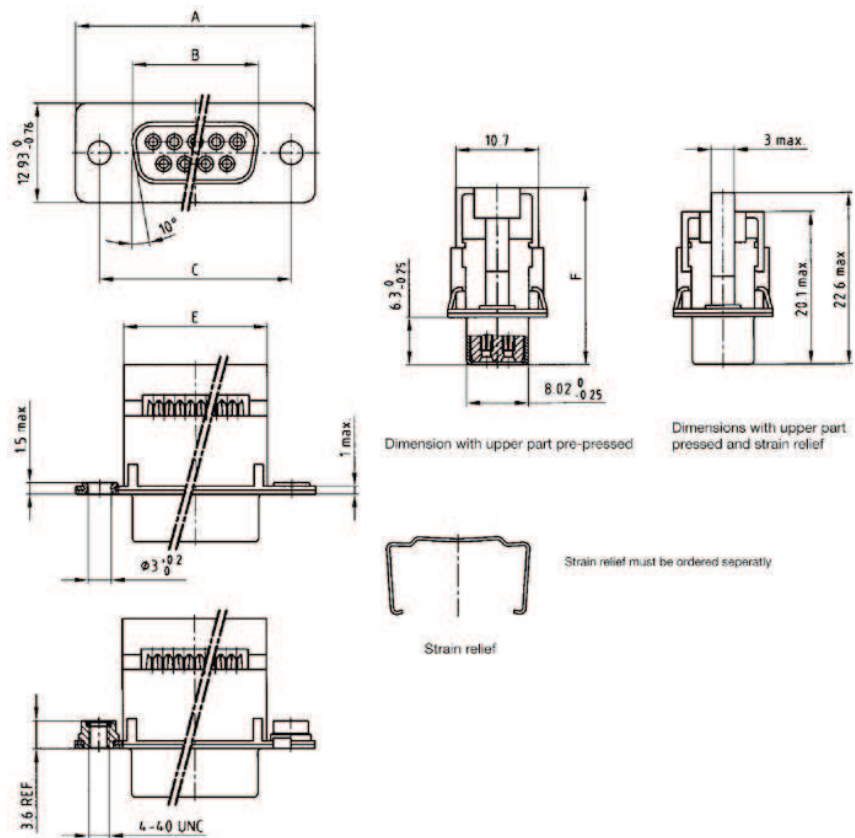

No. of Pos.	A -0.76	B -0.25	C	E -0.1
9	31.19	16.46	25.00 ^{+0.12} _{-0.13}	18.73
15	39.52	24.79	33.30 ^{+0.15} _{-0.16}	26.86
25	53.42	38.50	47.04 ^{+0.13}	40.78
37	69.70	55.96	63.50 ^{+0.13}	57.04

Part Numbers

Kat 1 | O2B

No. of Pos.	Tin Plated		
	Riveted	4-40 UNC	Strain Relief
9	162 A 11899 X	162 A 18669 X	160 X 10019 X
15	162 A 11909 X	162 A 18679 X	160 X 10029 X
25	162 A 11919 X	162 A 18689 X	160 X 10039 X
37	162 A 11929 X	162 A 18699 X	160 X 10049 X