
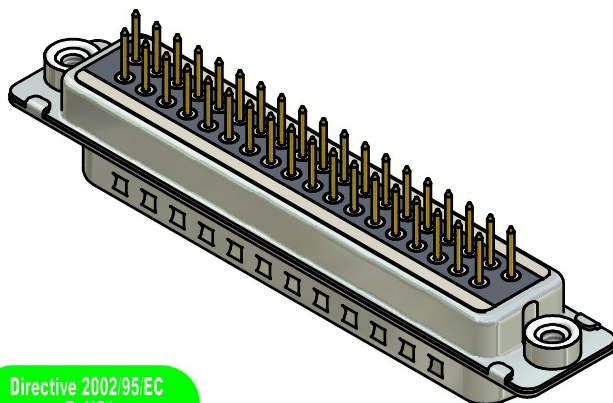

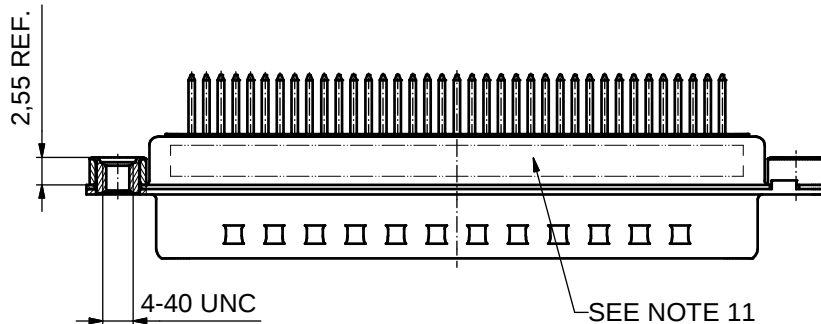
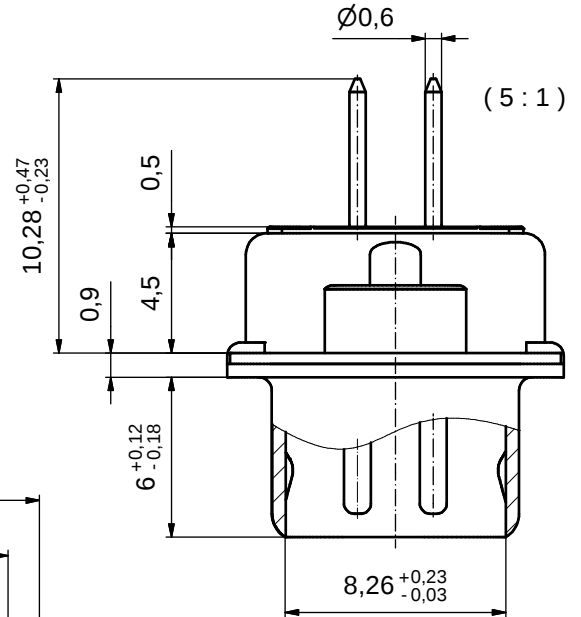


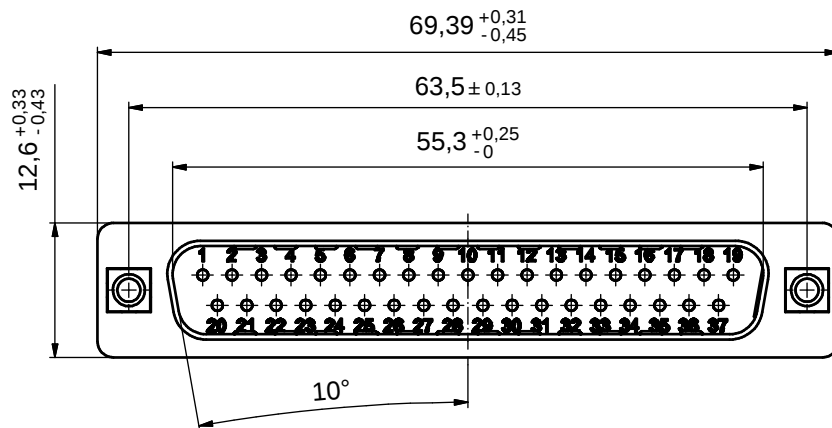

NOTES:

1. RoHS COMPLIANT
2. SUITABLE FOR WAVE SOLDERING
3. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
4. INSULATOR: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
6. CAPACITANCE: 1300pF ±20%
7. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
8. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin min. NICKEL
9. P.C.B HOLE DRILLINGS ON SHEET 2
10. MAXIMUM TORQUE VALUE FOR THREAD: 6in.LB
11. CONNECTOR IS PART MARKED: 241A10200X CONEC ABC

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND


rev.	description	date	name
a	Origin		

tolerance		 dim. in mm
	date	name
drawn	13.02.2008	Sonnenberg
appd.	13.02.2008	Mickenbecker
norm		
d-old		



scale:	2:1	
material:	SEE NOTES	
title:	D- SUB FILTER MALE 37pos. SOLDER PIN STRAIGHT with threaded insert	
dwg no:	Inventor 10	DIN-A3
	24K1A1068	sh: 1
part no:	241A10200X	

CONEC

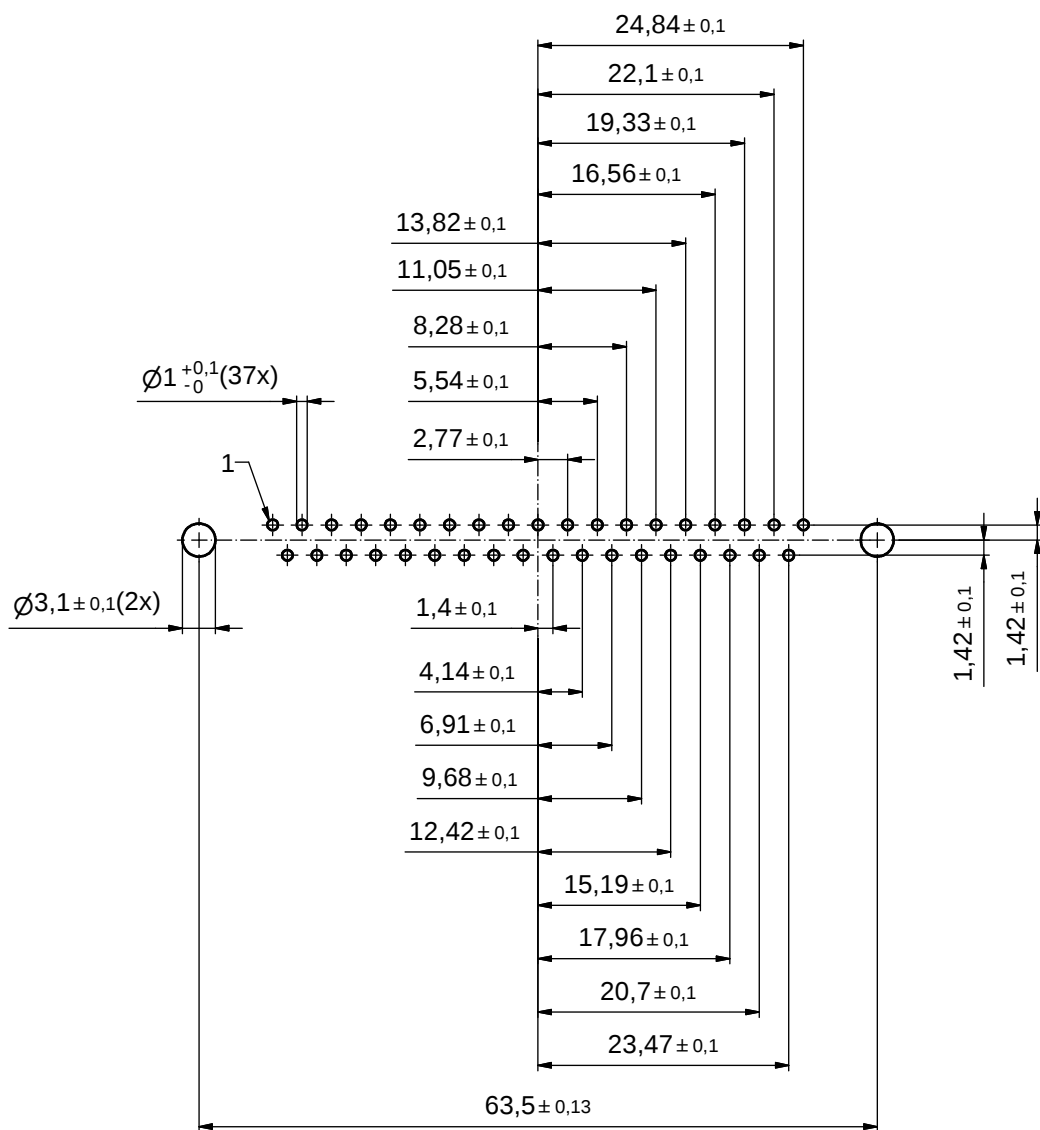

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance		
dim. in mm	date	name
drawn	13.02.2008	Sonnenberg
appd.	13.02.2008	Mickenbecker
norm		
d-old		



scale: 2:1	
material: SEE SHEET 1	
title: P.C.B. HOLE DRILLINGS D-SUB FILTER MALE 37pos. with threaded insert	
dwg no:	Inventor 10
24K1A1068	
part no:	SEE SHEET 1
DIN-A3 sh: 2	