



C-FILTER D-SUB STANDARD

Solder pin – Straight – Precision machined contacts

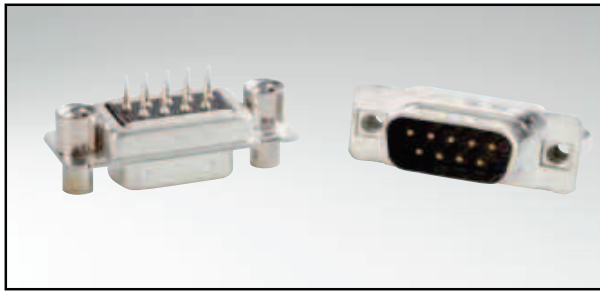

RoHS compliant – CSA listed, File No.: LR 115000-1 – UL listed, File No.: E202784


SOCKET CONNECTOR




No. of pos.	A -0.76	B -0.25	C
09	31.19	16.46	25.00 ^{+0.12} / _{-0.13}
15	39.52	24.79	33.30 ^{+0.15} / _{-0.10}
25	53.42	38.50	47.04 ^{+0.13} / _{-0.10}
37	69.70	54.96	63.50 ^{+0.13} / _{-0.10}
50	67.31	52.55	61.10 ^{+0.14} / _{-0.11}

PCB layout: Kat1kFUA

Mounting style: Threaded rear spacer

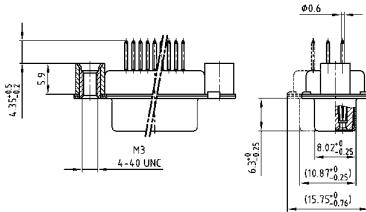

Mounting style: Threaded rear spacer, front spacer

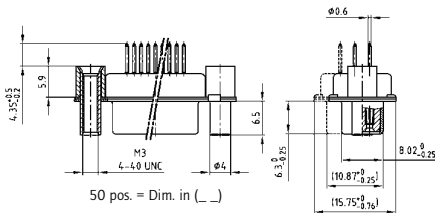

ORDER DATA

Capacitance 180 pF


SOCKET CONNECTOR

No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer	242 A 16210 X
15	4-40 UNC Threaded rear spacer	242 A 16220 X
25	4-40 UNC Threaded rear spacer	242 A 16230 X
37	4-40 UNC Threaded rear spacer	242 A 16240 X
50	4-40 UNC Threaded rear spacer	242 A 16250 X
09	M3 Threaded rear spacer	242 A 16260 X
15	M3 Threaded rear spacer	242 A 16270 X
25	M3 Threaded rear spacer	242 A 16280 X
37	M3 Threaded rear spacer	242 A 16290 X
50	M3 Threaded rear spacer	242 A 16300 X
09	4-40 UNC Front / Threaded rear spacer	242 A 16310 X
15	4-40 UNC Front / Threaded rear spacer	242 A 16320 X
25	4-40 UNC Front / Threaded rear spacer	242 A 16330 X
37	4-40 UNC Front / Threaded rear spacer	242 A 16340 X
50	4-40 UNC Front / Threaded rear spacer	242 A 16350 X
09	M3 Front / Threaded rear spacer	242 A 16360 X
15	M3 Front / Threaded rear spacer	242 A 16370 X
25	M3 Front / Threaded rear spacer	242 A 16380 X
37	M3 Front / Threaded rear spacer	242 A 16390 X
50	M3 Front / Threaded rear spacer	242 A 16400 X

DESCRIPTION

- Mounting styles:
 - with 4-40 UNC or M3 threaded rear spacer
 - with 4-40 UNC or M3 front and threaded rear spacer
- Quality class 3 (also available in quality class 1)
- Shell: Steel tin plated (brass tin plated on request)


PLUG CONNECTOR




No. of pos.	A -0.76	B -0.25	C	D -0.3
09	31.19	16.79	25.00 ^{+0.12} / _{-0.13}	6.12
15	39.52	25.12	33.30 ^{+0.15} / _{-0.10}	6.12
25	53.42	38.84	47.04 ^{+0.13} / _{-0.10}	5.99
37	69.70	55.30	63.50 ^{+0.13} / _{-0.10}	5.99
50	67.31	52.68	61.10 ^{+0.14} / _{-0.11}	5.99

PCB layout: Kat1kFUA

Mounting style: Threaded rear spacer

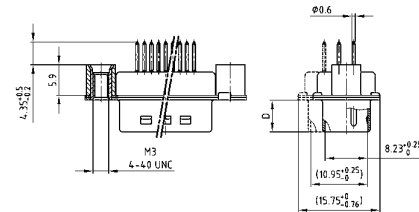

Mounting style: Threaded rear spacer, front spacer

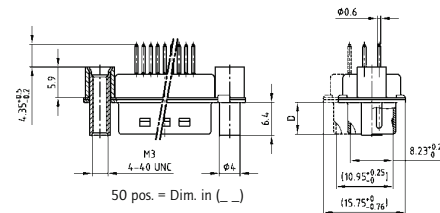

ORDER DATA

Capacitance 180 pF

PLUG CONNECTOR

No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer	241 A 18830 X
15	4-40 UNC Threaded rear spacer	241 A 18840 X
25	4-40 UNC Threaded rear spacer	241 A 18850 X
37	4-40 UNC Threaded rear spacer	241 A 18860 X
50	4-40 UNC Threaded rear spacer	241 A 18870 X
09	M3 Threaded rear spacer	241 A 18880 X
15	M3 Threaded rear spacer	241 A 18890 X
25	M3 Threaded rear spacer	241 A 18900 X
37	M3 Threaded rear spacer	241 A 18910 X
50	M3 Threaded rear spacer	241 A 18920 X
09	4-40 UNC Front / Threaded rear spacer	241 A 18930 X
15	4-40 UNC Front / Threaded rear spacer	241 A 18940 X
25	4-40 UNC Front / Threaded rear spacer	241 A 18950 X
37	4-40 UNC Front / Threaded rear spacer	241 A 18960 X
50	4-40 UNC Front / Threaded rear spacer	241 A 18970 X
09	M3 Front / Threaded rear spacer	241 A 18980 X
15	M3 Front / Threaded rear spacer	241 A 18990 X
25	M3 Front / Threaded rear spacer	241 A 19000 X
37	M3 Front / Threaded rear spacer	241 A 19010 X
50	M3 Front / Threaded rear spacer	241 A 19020 X

C-FILTER D-SUB STANDARD

Solder pin – Straight – Precision machined contacts

ORDER DATA

Capacitance 370 pF

SOCKET CONNECTOR			PLUG CONNECTOR		
No. of pos.	Mounting style	Part Number	No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer	242 A 10370 X	09	4-40 UNC Threaded rear spacer	241 A 10370 X
15	4-40 UNC Threaded rear spacer	242 A 10380 X	15	4-40 UNC Threaded rear spacer	241 A 10380 X
25	4-40 UNC Threaded rear spacer	242 A 10390 X	25	4-40 UNC Threaded rear spacer	241 A 10390 X
37	4-40 UNC Threaded rear spacer	242 A 10400 X	37	4-40 UNC Threaded rear spacer	241 A 10400 X
50	4-40 UNC Threaded rear spacer	242 A 15670 X	50	4-40 UNC Threaded rear spacer	241 A 15780 X
09	M3 Threaded rear spacer	242 A 10490 X	09	M3 Threaded rear spacer	241 A 10490 X
15	M3 Threaded rear spacer	242 A 10500 X	15	M3 Threaded rear spacer	241 A 10500 X
25	M3 Threaded rear spacer	242 A 10510 X	25	M3 Threaded rear spacer	241 A 10510 X
37	M3 Threaded rear spacer	242 A 10520 X	37	M3 Threaded rear spacer	241 A 10520 X
50	M3 Threaded rear spacer	242 A 15700 X	50	M3 Threaded rear spacer	241 A 15810 X
09	4-40 UNC Front / Threaded rear spacer	242 A 10610 X	09	4-40 UNC Front / Threaded rear spacer	241 A 10610 X
15	4-40 UNC Front / Threaded rear spacer	242 A 10620 X	15	4-40 UNC Front / Threaded rear spacer	241 A 10620 X
25	4-40 UNC Front / Threaded rear spacer	242 A 10630 X	25	4-40 UNC Front / Threaded rear spacer	241 A 10630 X
37	4-40 UNC Front / Threaded rear spacer	242 A 10640 X	37	4-40 UNC Front / Threaded rear spacer	241 A 10640 X
50	4-40 UNC Front / Threaded rear spacer	242 A 15730 X	50	4-40 UNC Front / Threaded rear spacer	241 A 15840 X
09	M3 Front / Threaded rear spacer	242 A 10730 X	09	M3 Front / Threaded rear spacer	241 A 10730 X
15	M3 Front / Threaded rear spacer	242 A 10740 X	15	M3 Front / Threaded rear spacer	241 A 10740 X
25	M3 Front / Threaded rear spacer	242 A 10750 X	25	M3 Front / Threaded rear spacer	241 A 10750 X
37	M3 Front / Threaded rear spacer	242 A 10760 X	37	M3 Front / Threaded rear spacer	241 A 10760 X
50	M3 Front / Threaded rear spacer	242 A 15760 X	50	M3 Front / Threaded rear spacer	241 A 15870 X

Capacitance 830 pF

Socket Connector			Plug Connector		
No. of pos.	Mounting style	Part Number	No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer	242 A 10450 X	09	4-40 UNC Threaded rear spacer	241 A 10450 X
15	4-40 UNC Threaded rear spacer	242 A 10460 X	15	4-40 UNC Threaded rear spacer	241 A 10460 X
25	4-40 UNC Threaded rear spacer	242 A 10470 X	25	4-40 UNC Threaded rear spacer	241 A 10470 X
37	4-40 UNC Threaded rear spacer	242 A 10480 X	37	4-40 UNC Threaded rear spacer	241 A 10480 X
50	4-40 UNC Threaded rear spacer	242 A 15690 X	50	4-40 UNC Threaded rear spacer	241 A 15800 X
09	M3 Threaded rear spacer	242 A 10570 X	09	M3 Threaded rear spacer	241 A 10570 X
15	M3 Threaded rear spacer	242 A 10580 X	15	M3 Threaded rear spacer	241 A 10580 X
25	M3 Threaded rear spacer	242 A 10590 X	25	M3 Threaded rear spacer	241 A 10590 X
37	M3 Threaded rear spacer	242 A 10600 X	37	M3 Threaded rear spacer	241 A 10600 X
50	M3 Threaded rear spacer	242 A 15720 X	50	M3 Threaded rear spacer	241 A 15830 X
09	4-40 UNC Front / Threaded rear spacer	242 A 10690 X	09	4-40 UNC Front / Threaded rear spacer	241 A 10690 X
15	4-40 UNC Front / Threaded rear spacer	242 A 10700 X	15	4-40 UNC Front / Threaded rear spacer	241 A 10700 X
25	4-40 UNC Front / Threaded rear spacer	242 A 10710 X	25	4-40 UNC Front / Threaded rear spacer	241 A 10710 X
37	4-40 UNC Front / Threaded rear spacer	242 A 10720 X	37	4-40 UNC Front / Threaded rear spacer	241 A 10720 X
50	4-40 UNC Front / Threaded rear spacer	242 A 15750 X	50	4-40 UNC Front / Threaded rear spacer	241 A 15860 X
09	M3 Front / Threaded rear spacer	242 A 10810 X	09	M3 Front / Threaded rear spacer	241 A 10810 X
15	M3 Front / Threaded rear spacer	242 A 10820 X	15	M3 Front / Threaded rear spacer	241 A 10820 X
25	M3 Front / Threaded rear spacer	242 A 10830 X	25	M3 Front / Threaded rear spacer	241 A 10830 X
37	M3 Front / Threaded rear spacer	242 A 10840 X	37	M3 Front / Threaded rear spacer	241 A 10840 X
50	M3 Front / Threaded rear spacer	242 A 15780 X	50	M3 Front / Threaded rear spacer	241 A 15890 X

Capacitance 1300 pF

SOCKET CONNECTOR				PLUG CONNECTOR			
No. of pos.	Mounting style	Part Number		No. of pos.	Mounting style	Part Number	
09	4-40 UNC Threaded rear spacer	242 A 10410	X	09	4-40 UNC Threaded rear spacer	241 A 10410	X
15	4-40 UNC Threaded rear spacer	242 A 10420	X	15	4-40 UNC Threaded rear spacer	241 A 10420	X
25	4-40 UNC Threaded rear spacer	242 A 10430	X	25	4-40 UNC Threaded rear spacer	241 A 10430	X
37	4-40 UNC Threaded rear spacer	242 A 10440	X	37	4-40 UNC Threaded rear spacer	241 A 10440	X
50	4-40 UNC Threaded rear spacer	242 A 15680	X	50	4-40 UNC Threaded rear spacer	241 A 15790	X
09	M3 Threaded rear spacer	242 A 10530	X	09	M3 Threaded rear spacer	241 A 10530	X
15	M3 Threaded rear spacer	242 A 10540	X	15	M3 Threaded rear spacer	241 A 10540	X
25	M3 Threaded rear spacer	242 A 10550	X	25	M3 Threaded rear spacer	241 A 10550	X
37	M3 Threaded rear spacer	242 A 10560	X	37	M3 Threaded rear spacer	241 A 10560	X
50	M3 Threaded rear spacer	242 A 15710	X	50	M3 Threaded rear spacer	241 A 15820	X
09	4-40 UNC Front / Threaded rear spacer	242 A 10650	X	09	4-40 UNC Front / Threaded rear spacer	241 A 10650	X
15	4-40 UNC Front / Threaded rear spacer	242 A 10660	X	15	4-40 UNC Front / Threaded rear spacer	241 A 10660	X
25	4-40 UNC Front / Threaded rear spacer	242 A 10670	X	25	4-40 UNC Front / Threaded rear spacer	241 A 10670	X
37	4-40 UNC Front / Threaded rear spacer	242 A 10680	X	37	4-40 UNC Front / Threaded rear spacer	241 A 10680	X
50	4-40 UNC Front / Threaded rear spacer	242 A 15740	X	50	4-40 UNC Front / Threaded rear spacer	241 A 15850	X
09	M3 Front / Threaded rear spacer	242 A 10770	X	09	M3 Front / Threaded rear spacer	241 A 10770	X
15	M3 Front / Threaded rear spacer	242 A 10780	X	15	M3 Front / Threaded rear spacer	241 A 10780	X
25	M3 Front / Threaded rear spacer	242 A 10790	X	25	M3 Front / Threaded rear spacer	241 A 10790	X
37	M3 Front / Threaded rear spacer	242 A 10800	X	37	M3 Front / Threaded rear spacer	241 A 10800	X
50	M3 Front / Threaded rear spacer	242 A 15770	X	50	M3 Front / Threaded rear spacer	241 A 15880	X