

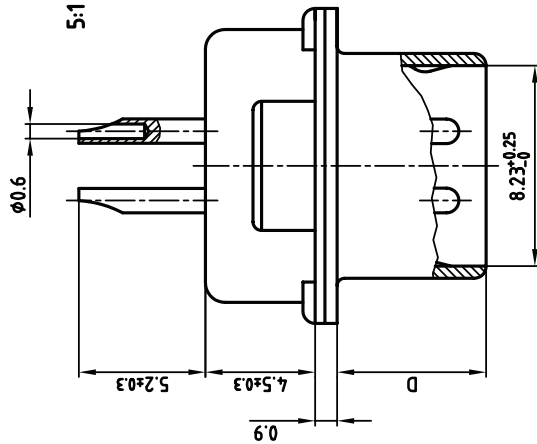
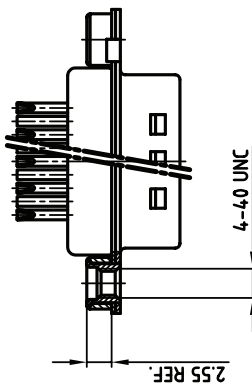


used for: D-SUB FILTER



NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
5. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. SOLDER CUP: AWG 26
7. CAPACITANCE: 370pF ±20%
8. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS

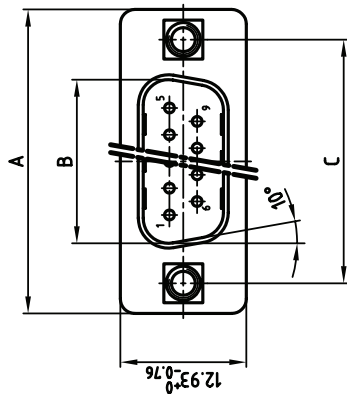

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH DO NOT ALTER CAD DRAWING BY HAND

POS.	A -0.76	B +0.25	C -0.3	D -0.3	PART-NO.
9	31.19	16.79	25.00 -0.12 -0.13	6.12	24-1A11720X
15	39.52	25.12	33.30 -0.15 -0.1	6.12	24-1A11730X
25	53.42	38.84	47.04 ±0.13	5.99	24-1A11740X
37	69.70	55.30	63.50 ±0.13	5.99	24-1A11750X

tolerance		date		name	
		2001		drawn	
		02.01.		E. Hickenbecker	
		norm		DIN 41652	
		d-old			

rev	description	date	name

scale: 2:1 (5:1)	material: SEE NOTES	title: D-FILTER MALE 9-37pos. SOLDER CUP with threaded insert
dwg no: 24K1A084A		DIN-A 3
part no: SEE TABLE		ish: 1/1

