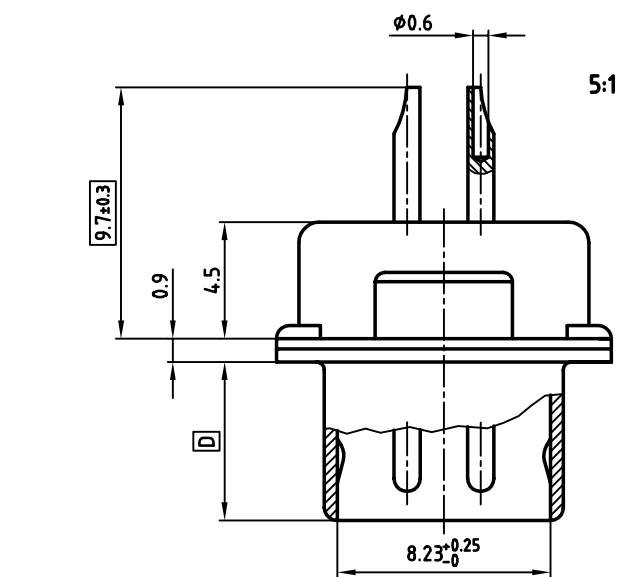
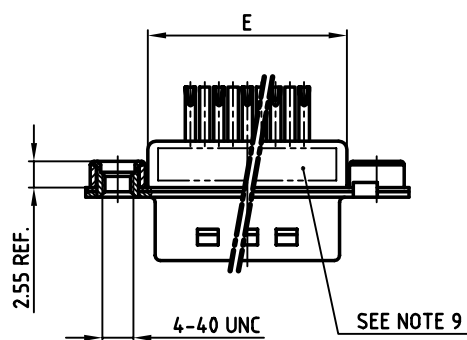
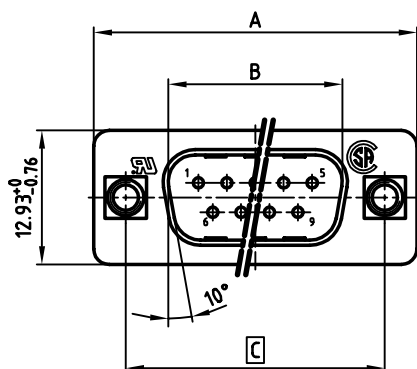


NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: min. 8μ" HARD GOLD OVER min. 50μ" NICKEL
SOLDER CUP ACCEPTS CABLE AWG 26
4. THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
5. COLLAR: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
6. CAPACITANCE: 830pF ±20%
7. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
8. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
9. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
10. = CRITICAL DIMENSION

POS.	A -0.76	B $+0.25$	C	D -0.3	max. E	PART-NO.
9	31.19	16.79	25.00 $+0.12$ -0.13	6.12	19.60	241A11800X
15	39.52	25.12	33.30 $+0.15$ -0.1	6.12	27.90	241A11810X
25	53.42	38.84	47.04 ± 0.13	5.99	41.60	241A11820X
37	69.70	55.30	63.50 ± 0.13	5.99	58.00	241A11830X

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

				tolerance				scale: 2:1 (5:1)			
								material: SEE NOTES			
				2002	date	name		title: D-SUB FILTER MALE 9-37pos. SOLDER CUP with threaded insert			
				drawn	24.10.	Parei					
				appd.	24.10.	Kühle					
				norm	DIN 41652						
				d-old							
								dwg no:		AutoCAD 2000	DIN-A
								24K1A331		3	
										sh: 1/1	
rev.	description	date	name	part no: SEE TABLE							