
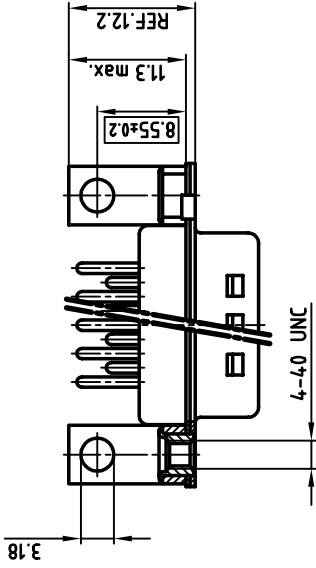
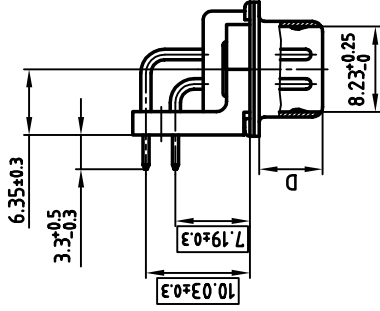



No. of pos.	A _{-0.76}	B _{+0.25}	C	D _{-0.3}	Part NO.
9	31.19	16.79	25.00 _{-0.12} ^{+0.12}	6.12	241A12360X
15	39.52	25.12	33.30 _{-0.1} ^{+0.1}	6.12	241A12370X
25	53.42	38.84	47.04 _{-0.13} ^{+0.13}	5.99	241A12380X
37	69.70	55.30	63.50 _{-0.13} ^{+0.13}	5.99	241A12390X

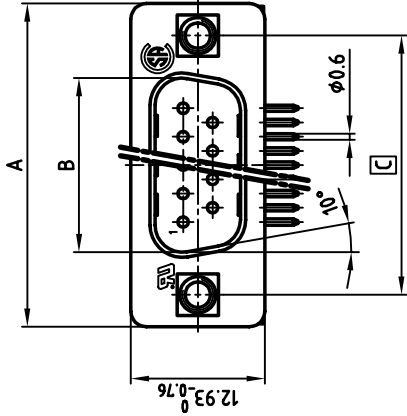

NOTES:

- METALSHELLS: STEEL; min. 320μ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
- PLATING: min. 8μ" HARD GOLD OVER min. 50μ" NICKEL
- METAL BRACKET: STEEL; min. 320μ" TIN over 80μ" NICKEL
- THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
- P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K111UA
- CAPACITANCE: 1300pF ±20%
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- ☐ = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

		tolerance				DIN 41652		E. Mickenbecker		DIN 41652	
		2001		date		name					
		drawn		01.08.		Parel					
		appd.		01.08.							
		norm									
		d-old									