

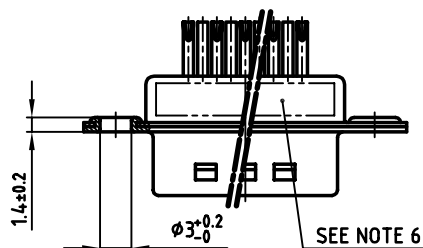
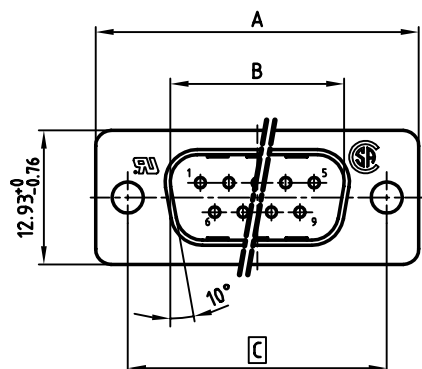


used for: D-SUB FILTER

POS.	A -0.76	B +0.25	C	D -0.3	Part No.
9	31.19	16.79	25.00 ^{+0.12} _{-0.13}	6.12	241A11640X
15	39.52	25.12	33.30 ^{+0.15} _{-0.1}	6.12	241A11650X
25	53.42	38.84	47.04 ^{±0.13}	5.99	241A11660X
37	69.70	55.30	63.50 ^{±0.13}	5.99	241A11670X

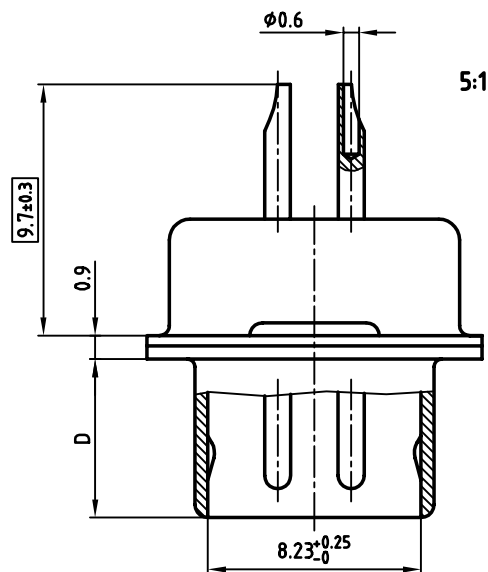

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
SOLDER CUP ACCEPTS CABLE AWG 26
- CAPACITANCE: 1300pF ±20%
- DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
- CONNECTOR IS PART MARKED: PART-NÖ. CONEC Y/WW
- ☐ = CRITICAL DIMENSION

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON	APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON	APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		dim. in mm
2003	date	name
drawn	12.03.	Parei
appd.	12.03.	Kühle
norm	DIN 41652	
d-old		
CONEC®		

scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	D-SUB FILTER MALE 9-37pos. SOLDER CUP	
dwg no:	AutoCAD 2000	DIN-A
	24K1A365	3
part no:	SEE TABLE	
		sh: 1/1