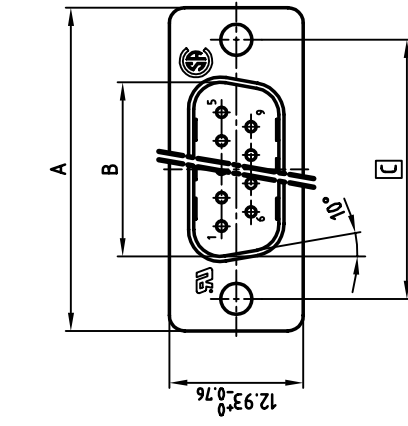


NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8μ" HARD GOLD OVER min. 50μ" NICKEL
5. SOLDER CUP ACCEPTS CABLE AWG 26
6. CAPACITANCE: 830pF ±20%
7. CONNECTOR IS PART MARKED:

PART-NO.	CONC	Y/W/W
----------	------	-------
8.

--

 = CRITICAL DIMENSION

POS.	A ± 0.75	B ± 0.25	C	D ± 0.3	Part NO.
9	31.19	16.79	25.00 ± 0.12 -0.13	6.12	241A11680X
15	39.52	25.12	33.30 ± 0.15 -0.1	6.12	241A11690X
25	53.42	38.84	47.04 ± 0.13	5.99	241A11700X
37	69.70	55.30	63.50 ± 0.13	5.99	241A11710X

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GMBH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance				scale: 2:1 (5:1)		SEE NOTES		
				2002	date	name	D-SUB FILTER MALE 9-37pos. SOLDER CUP					
				drawn	26.03.	Parei						
				appd.	26.03.	E. Mickenbecker						
				norm	DIN 41652							
				d-old								
												
							dwg no:		AutoCAD 2000		DIN-A	
									24K1A229		3	
											sh: 1/1	
rev	description	date	name	part no: SEE TABLE								

used for:	D-SUB FILTER
-----------	--------------