
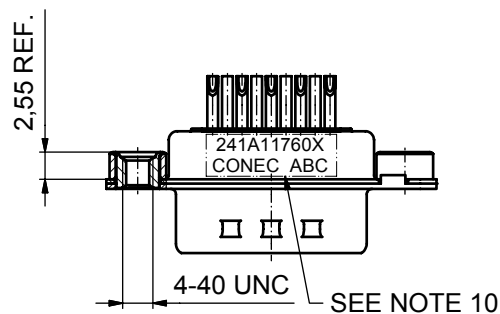
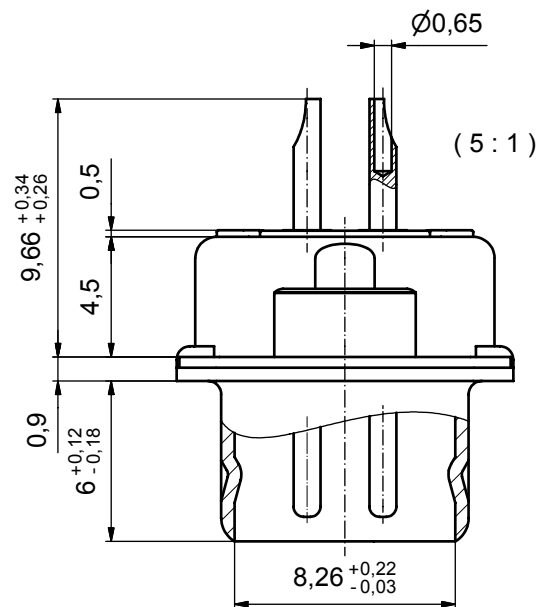
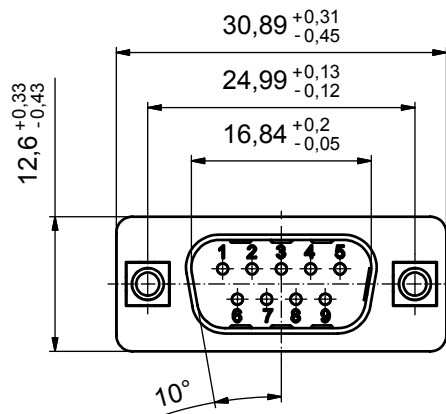


NOTES:

1. RoHS COMPLIANT
2. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
3. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
4. CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
SOLDER CUP ACCEPTS CABLE AWG 26
5. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. COLLAR: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
7. CAPACITANCE: 1300pF ± 20%
8. DIELECTRIC WITHSTANDING VOLTAGE: 424 VDC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
10. CONNECTOR IS PART MARKED: [241A11760X CONEC ABC]



Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

				tolerance		dim. in mm
rev.	description	date	name	date	name	
a	Origin			05.03.09	Lehmenkühler	
				06.03.09	Fischer	
				norm		
				d-old		
				CONEC®		

scale:		2:1 (5:1)	
material:		SEE NOTES	
title:			
D-SUB FILTER MALE			
9pos. SOLDER CUP			
dwg no:		Inventor 10	DIN-
24K1A1154			A3
			sh: 1
part no:		241A11760X	