

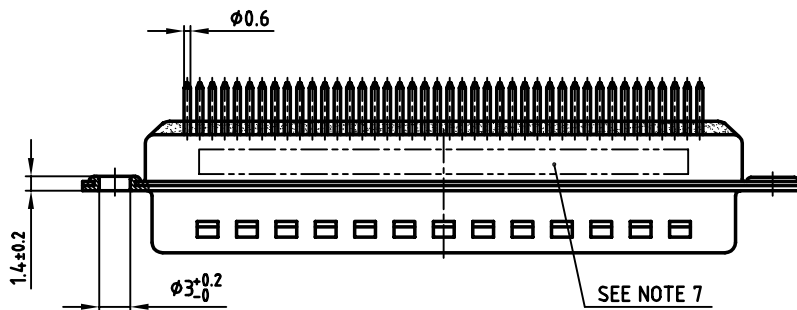
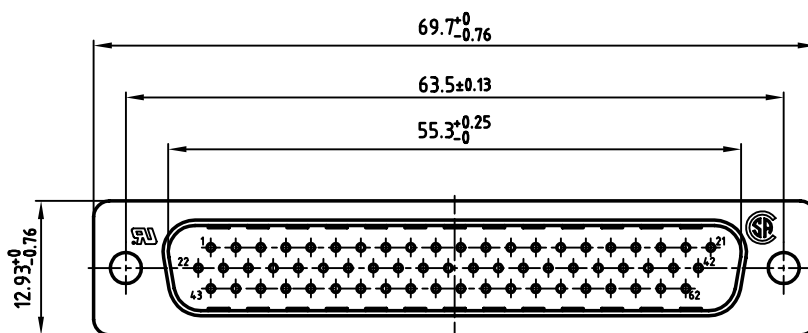


used for:	D-SUB HD FILTER
-----------	-----------------

5:1

SEALING COMPOUND

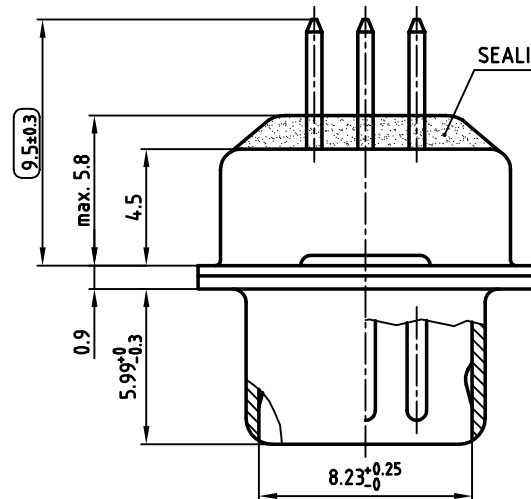

NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V11H5B
5. CAPACITANCE: SEE TABLE
6. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
7. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
8. = CHECK DIMENSION

CAPACITANCE	PART NO.
180pF $\pm 20\%$	241A27510X
370pF $\pm 20\%$	241A16410X
830pF $\pm 20\%$	241A16450X

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance



scale:	2:1 (5:1)
material:	SEE NOTE

title:	D-SUB HD FILTER MALE 62pos. SOLDER PIN STRAIGHT
--------	---

dwg no:	AutoCAD 2000	DIN-A
---------	--------------	-------

24K1A448

part no: SEE TABLE

