

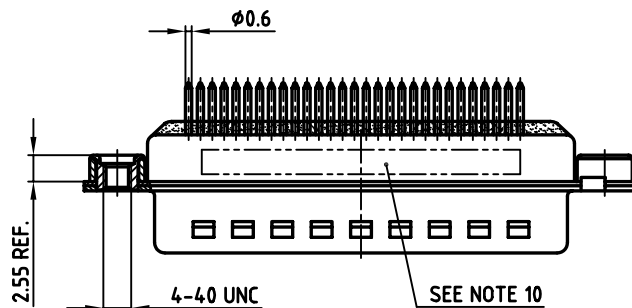
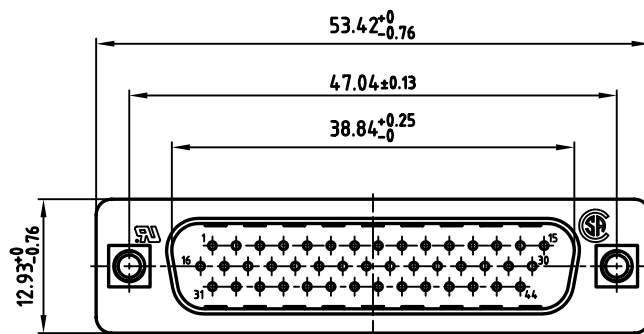


used for:	D-SUB HD FILTER
-----------	-----------------

5:1

SEALING COMPOUND

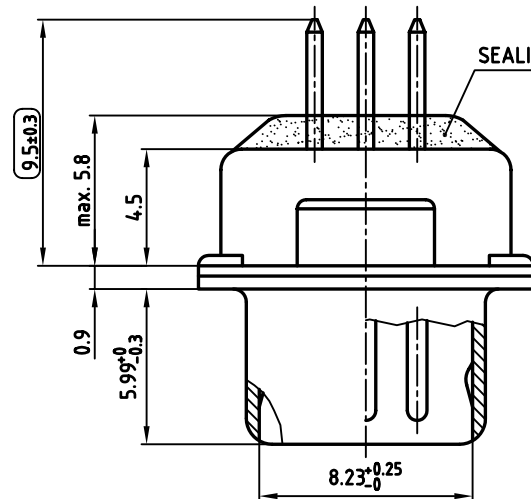

NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. THREADED INSERT: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
5. COLLAR: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1IH5B
7. CAPACITANCE: SEE TABLE
8. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
11. = CHECK DIMENSION

CAPACITANCE	PART NO.
180pF $\pm 20\%$	241A27540X
370pF $\pm 20\%$	241A16480X
830pF $\pm 20\%$	241A16520X

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACON # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

[illegible]

tolerance		 dim. in mm
2003	date	name
drawn	23.09.	Lehmenkühler
appd.	24.09.	Mickenbecker
norm	DIN 41652	
d-old		

CONEC

scale:	2:1 (5:1)	
material:	SEE NOTES	
title:	D-SUB HD FILTER MALE 44pos. SOLDER PIN STRAIGHT with threaded insert	
dwg no:	AutoCAD 2000	DIN-A
24K1A459		3
part no:		SEE TABLE
		sh: 1/1