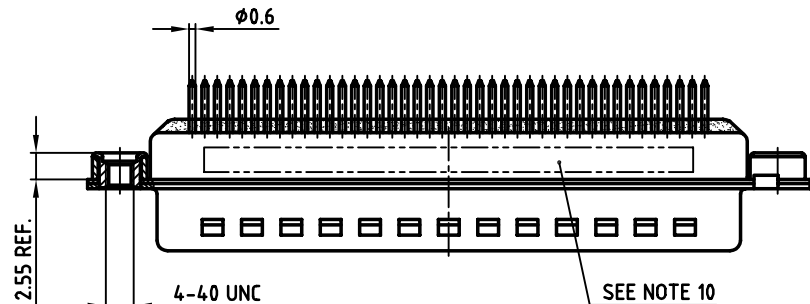
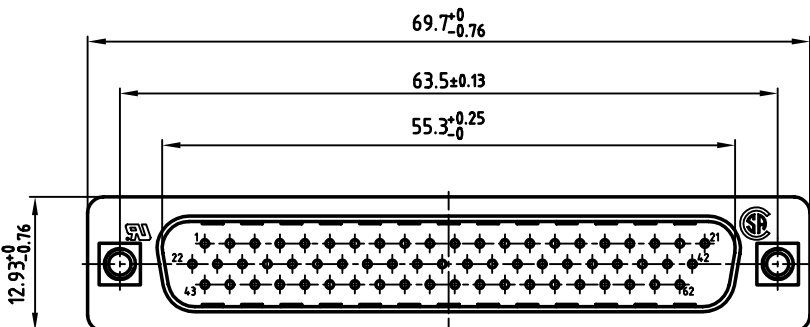
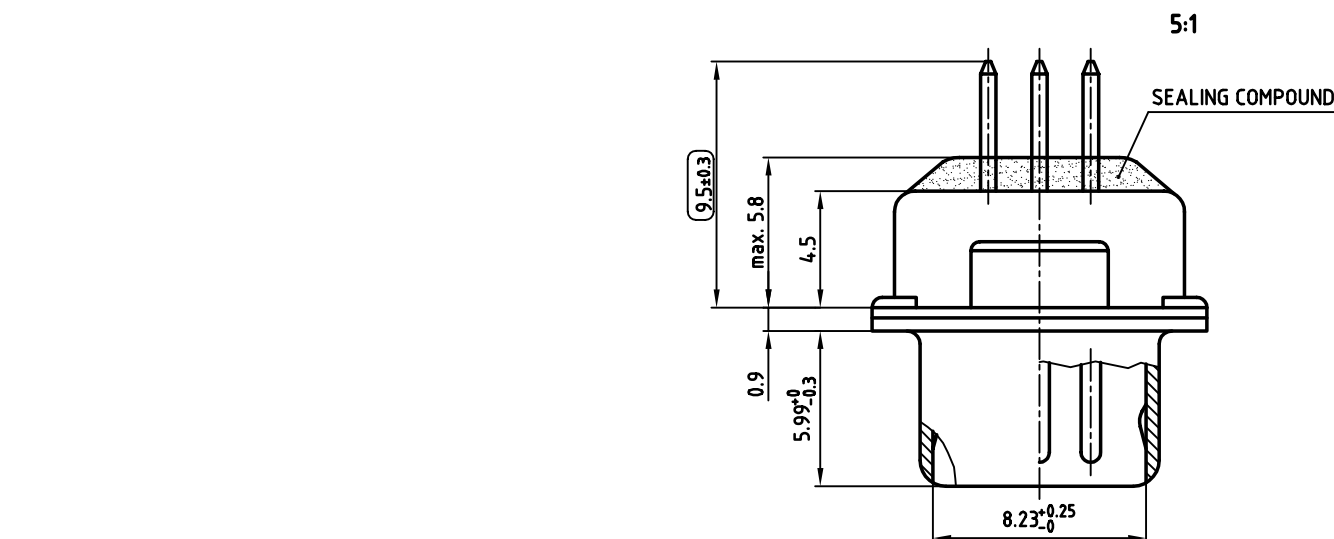


- NOTES:**
1. METAL SHELLS: STEEL; min. 320µ" TIN
 2. INSULATORS: PBT GF UL 94 V-0, BLACK
 3. CONTACTS: COPPER ALLOY
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
 4. THREADED INSERT: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
 5. COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
 6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1IH5B
 7. CAPACITANCE: SEE TABLE
 8. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
 9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
 10. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/W/W
 11. = CHECK DIMENSION

CAPACITANCE	PART NO.
180pF ±20%	241A27550X
370pF ±20%	241A16490X
830pF ±20%	241A16530X

APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

tolerance	scale: 2:1 (5:1)
dim. in mm	material: SEE NOTES
2003 date name	title: D-SUB HD FILTER MALE
drawn 16.09. Lehmenkühler	62pos. SOLDER PIN STRAIGHT
appd. 19.09. Mickenbecker	with threaded insert
norm DIN 41652	dwg no: AutoCAD 2000 DIN-A
d-old	24K1A449 3
part no: SEE TABLE	