
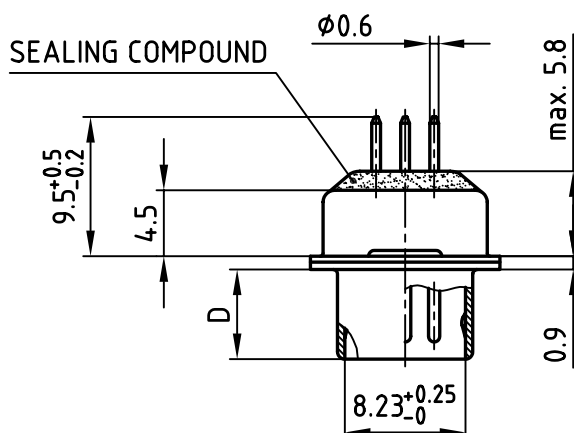
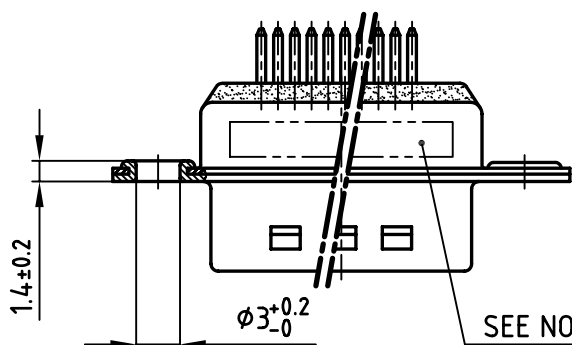


used for: D-SUB HD FILTER

POS.	A ^{-0.76}	B ^{+0.25}	C	D ^{-0.3}	PART-NO.
15	31.19	16.79	25.00 ^{+0.12 -0.13}	6.12	241A16420X
26	39.52	25.12	33.30 ^{+0.15 -0.1}	6.12	241A16430X
44	53.42	38.84	47.04 ^{±0.13}	5.99	241A16440X
62	69.70	55.30	63.50 ^{±0.13}	5.99	241A16450X

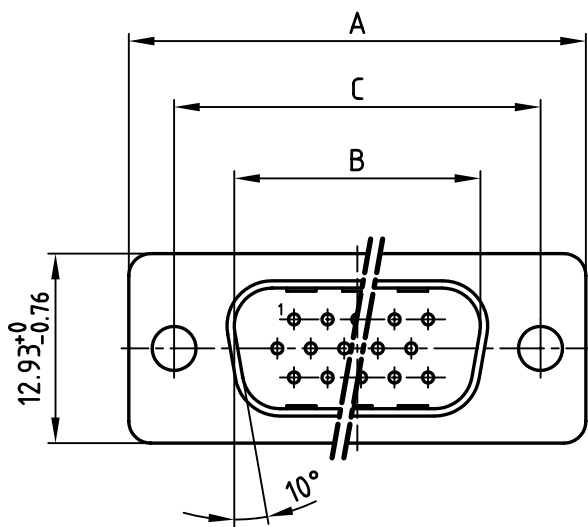


NOTES:

1. RoHS COMPLIANT
2. SUITABLE FOR WAVE SOLDERING
3. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
CONTACT TAILS PRETINNED
6. P.C.B. HOLE DRILLINGS ON SHEET 2
7. CAPACITANCE: 830pF ±20%
8. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
9. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

				tolerance		 dim. in mm
				2007	date	name
				drawn	22.05.	Lehmenkühler
				appd.	22.05.	Fischer
				norm	DIN 41652	
				d-old		
						
a	Origin					
rev.	description	date	name			

CONEC®

scale:	2:1	
material:	SEE NOTES	
title:	D-SUB HD FILTER MALE 15-62pos. SOLDER PIN STRAIGHT	
dwg no:	AutoCAD 2006	DIN-A
	24K1A998	4
		sh:1/2
part no:	SEE TABLE	

scale:	2:1	
material:	SEE SHEET 1	
title:	P.C.B. HOLE DRILLINGS D-SUB HD FILTER MALE 15-62pos. SOLDER PIN	
dwg no:	AutoCAD 2006	DIN-A
	24K1A998	3
		sh:2/2
part no:	SEE SHEET 1	