

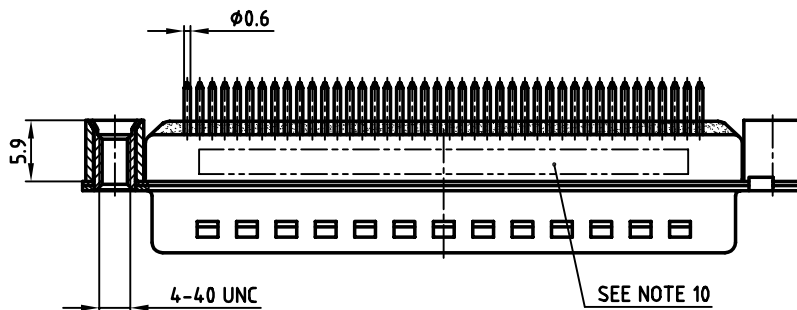
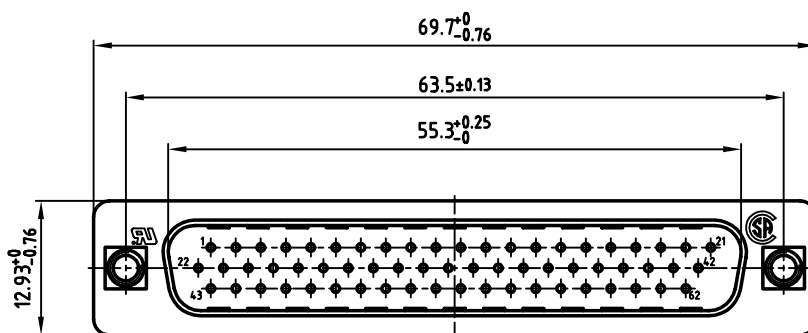


used for:	D-SUB HD FILTER
-----------	-----------------

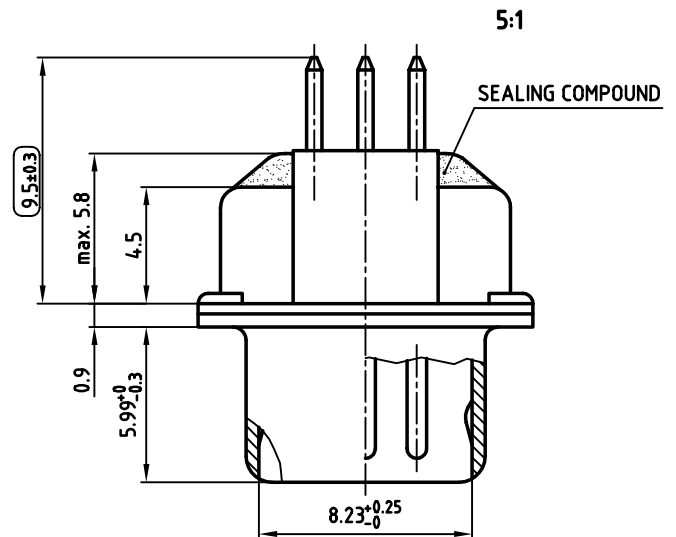

NOTES:

1. METALSHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. THREADED REAR SPACER: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
5. SLEEVE: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1H5B
7. CAPACITANCE: SEE TABLE
8. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. CONNECTOR IS PART MARKED:

PART-NO.	CONEC	Y/WW
----------	-------	------
11.

--

 = CHECK DIMENSION

CAPACITANCE	PART NO.
180pF $\pm 20\%$	241A27630X
370pF $\pm 20\%$	241A16650X
830nF $\pm 20\%$	241A16690X

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.

**OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND**

rev.	description	date	name

tolerance



scale:	2:1 (5:1)
material:	SEE NOTE

title:	D-SUB HD FILTER MALE
	62pos. SOLDER PIN STRAIGHT
	with threaded rear spacer

dwg no:	AutoCAD 2000	DIN-A
---------	--------------	-------

24K1A450

part no:	SEE TABLE
----------	-----------

