

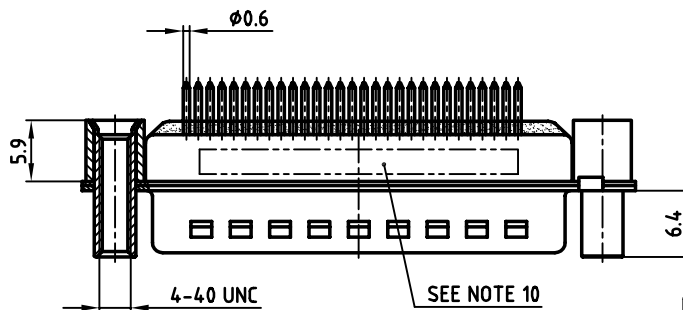
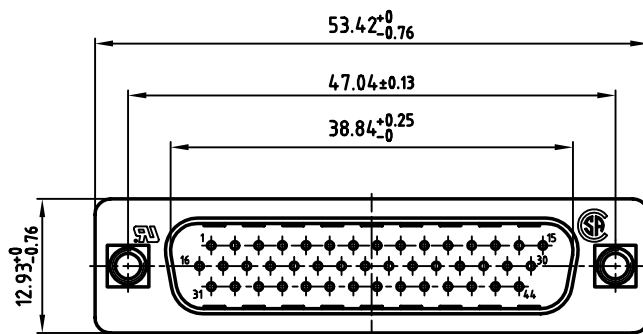


used for: D-SUB HD FILTER

5:1

SEALING COMPOUND

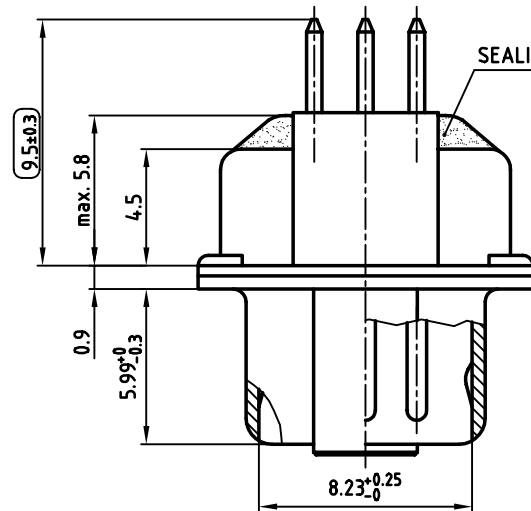

#### NOTES:

1. METAL SHELLS: STEEL; min. 320µ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY  
PLATING: 8µ" HARD GOLD OVER min. 50µ" NICKEL
4. THREADED REAR SPACER / FRONT THREADED LOCK: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
5. SLEEVE: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1H5B
7. CAPACITANCE: SEE TABLE
8. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
11. = CHECK DIMENSION

| CAPACITANCE | PART NO.   |
|-------------|------------|
| 180pF ±20%  | 241A27700X |
| 370pF ±20%  | 241A16800X |
| 830pF ±20%  | 241A16840X |

|                                                          |        |
|----------------------------------------------------------|--------|
| APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL |        |
| CUSTOMER APPROVAL DATE:                                  |        |
| NAME:                                                    | TITLE: |
| COMPANY NAME:                                            |        |
| APPROVAL * FREIGABE * DEBLOCAGE * AUTOR/ZACON * APPROVAL |        |

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.  
OWNERSHIP AND COPYRIGHT OF CONEC GmbH  
DO NOT ALTER CAD DRAWING BY HAND

| rev. | description | date | name |
|------|-------------|------|------|
|      |             |      |      |
|      |             |      |      |
|      |             |      |      |
|      |             |      |      |
|      |             |      |      |
|      |             |      |      |
|      |             |      |      |
|      |             |      |      |
|      |             |      |      |

|              |             |              |           |
|--------------|-------------|--------------|-----------|
| tolerance    |             | scale:       | 2:1 (5:1) |
| dim. in mm   |             | material:    | SEE NOTES |
| 2003         | date        | name         |           |
| drawn        | 23.09.      | Lehmenkühler |           |
| appd.        | 24.09.      | Mickenbecker |           |
| norm         | DIN 41652   |              |           |
| d-old        |             |              |           |
| <b>CONEC</b> |             |              |           |
| rev.         | description | date         | name      |

|                                              |              |
|----------------------------------------------|--------------|
| title:                                       |              |
| <b>D-SUB HD FILTER MALE</b>                  |              |
| 44pos. SOLDER PIN STRAIGHT                   |              |
| threaded rear spacer and front threaded lock |              |
| dwg no:                                      | AutoCAD 2000 |
| 24K1A461                                     |              |
| part no:                                     | SEE TABLE    |
| DIN-A                                        | 3            |
| sh:                                          | 1/1          |