
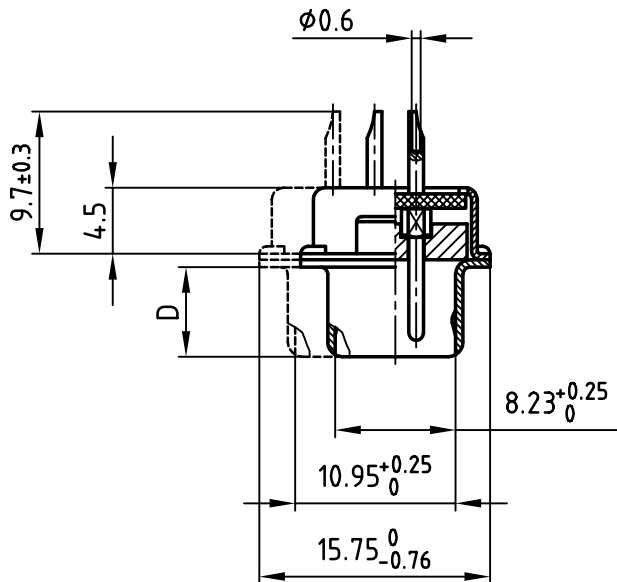
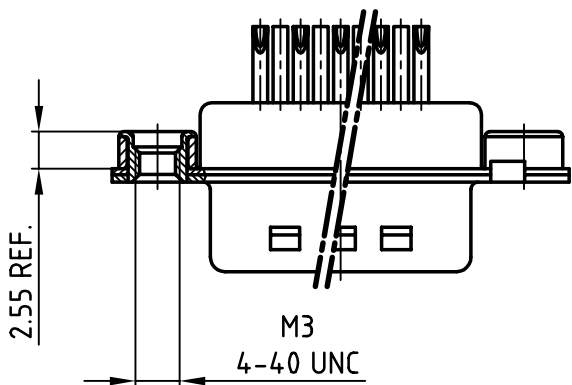


4 3 2 1

Verw. für: D-SUB Filter

Polzahl No. of pos.	A ^{-0.76}	B ^{+0.25}	C	D ^{-0.3}
9	31.19	16.79	25.00 ^{+0.12} _{-0.13}	6.12
15	39.52	25.12	33.30 ^{+0.15} _{-0.1}	6.12
25	53.42	38.84	47.04 ±0.13	5.99
37	69.70	55.30	63.50 ±0.13	5.99
50	67.31	52.68	61.10 ^{+0.14} _{-0.11}	5.99

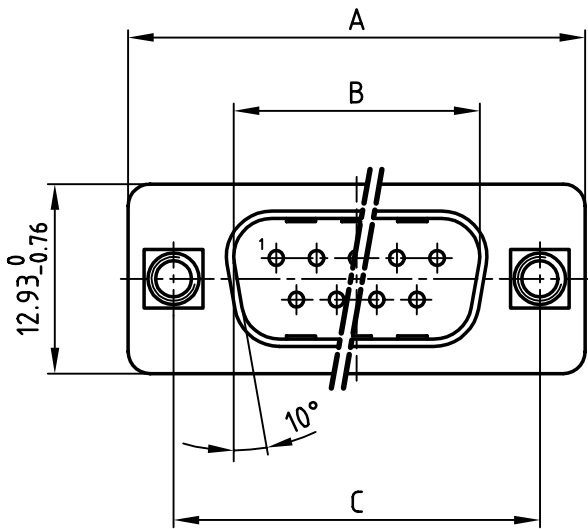

Lötkelch geeignet für Kabel AWG 26

Diese Zeichnung darf ohne unsere ausdrückliche, schriftliche Genehmigung weder vervielfältigt noch dritten Personen ausgehändigt werden. Eigentums- und Urheberrecht vorbehalten CAD-Unterlage nicht manuell ändern					Allgem.Tol.			Maßstab: 2:1		
								Material:		
					1996	DATUM	NAME	Benennung: D-Filter Stift Lötkelch mit Innengewinde 9-50pol. Katalogzeichnung		
					Gez.	09.08.	Barcinski			
					Gepr.	13.03.	Mickenbecker			
					Norm	DIN 41652				
					Z-Alt			Zeichn.Nr:		
								CAD/ REL.13	DIN-A	
								KAT11A4A		4
										Bl: 1/1
Zust.	Änderung	Datum	Name				Artikel Nr:			

4 3 2 1