

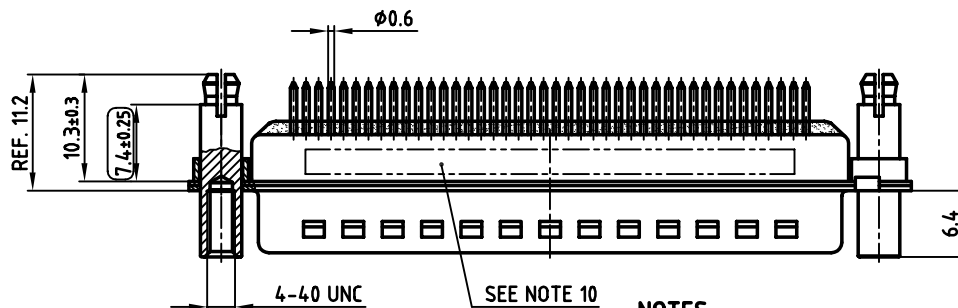
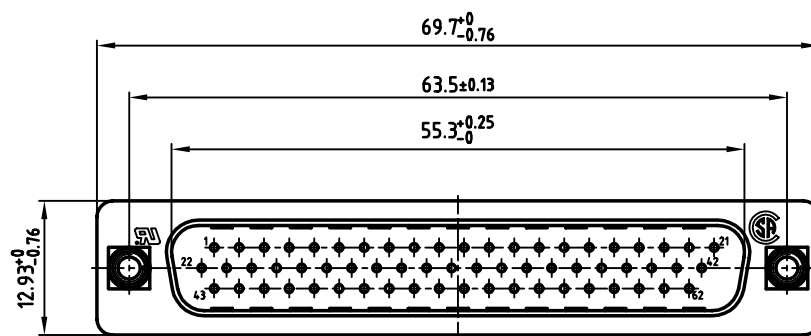


used for:	D-SUB HD FILTER
-----------	-----------------

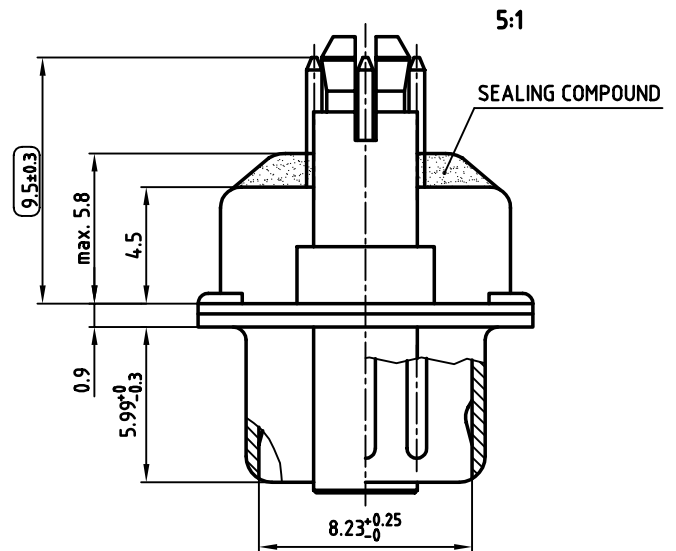

NOTES:

1. METAL SHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. THREADED LOCK/SPACER CLIP: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
PCB-HOLE: Ø3.1±0.1; PCB THICKNESS 1.6mm
5. COLLAR: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1H6B
7. CAPACITANCE: SEE TABLE
8. DIELECTRIC WITHSTANDING VOLTAGE: 300V DC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. CONNECTOR IS PART MARKED:

PART-NO.	CONEC	Y/WW
----------	-------	------
11.

--

 = CHECK DIMENSION

CAPACITANCE	PART NO.
180pF $\pm 20\%$	241A27910X
370pF $\pm 20\%$	241A20950X
830nF $\pm 20\%$	241A20990X

APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL	APPROVAL # FREIGABE # DEBLOCKAGE # AUTOR/ZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.

OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

[illegible]

tolerance		 dim. in mm
2003	date	name
drawn	19.09.	Lehmenkühler
appd.	19.09.	Mickenbecker
norm	DIN 41652	
d-old		

CONEC®

scale:		2:1 (5:1)	
material:		SEE NOTES	
title:			
D-SUB HD FILTER MALE 62pos. SOLDER PIN STRAIGHT with threaded lock and spacer clip			
dwg no:		AutoCAD 2000	DIN-A
24K1A454			3
part no:		SEE TABLE	
		sh: 1/1	