

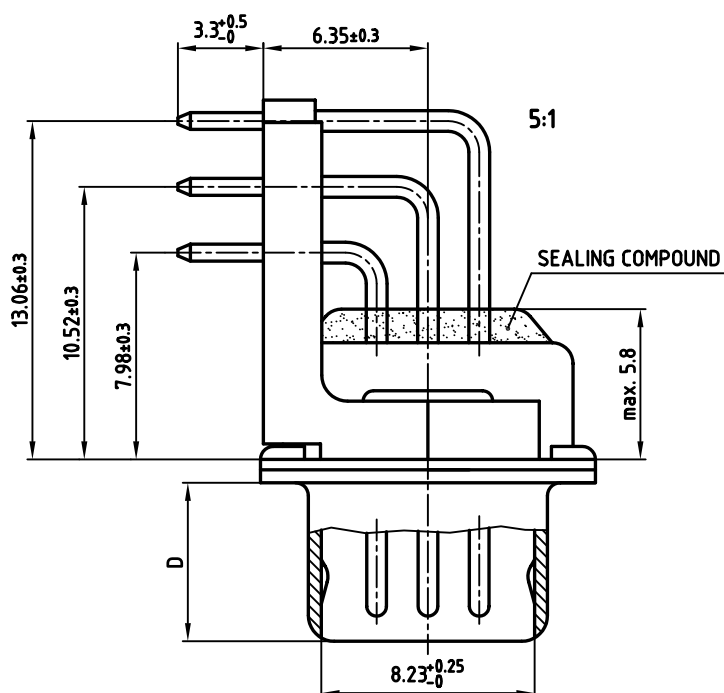
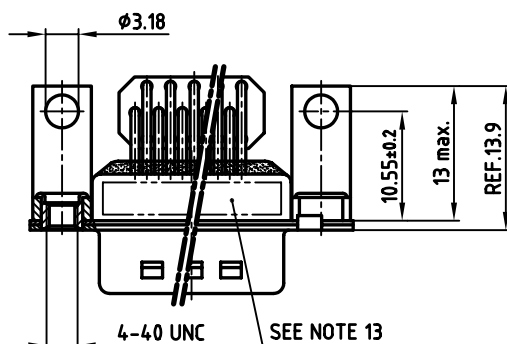


used for: D-SUB HD FILTER

No. of pos.	A -0.76	B $+0.25$	C	D -0.3	Part-NO.
15	31.19	16.79	25.00 $+0.12$ -0.13	6.12	241A25760X
26	39.52	25.12	33.30 $+0.15$ -0.1	6.12	241A25770X

(b)

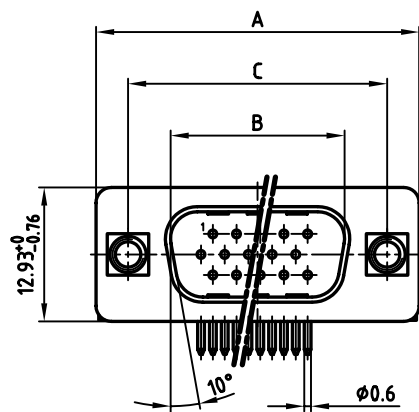

NOTES:

1. RoHS COMPLIANT
2. SUITABLE FOR WAVE SOLDERING
3. METALSHELLS: STEEL; min. 315pin TIN over 40-80pin NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0; BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8pin HARD GOLD OVER min. 50pin NICKEL
6. METAL BRACKET: ZINC DIE CAST; 300pin COPPER
40-120pin NICKEL/120-200pin TIN
7. THREADED INSERT: COPPER ALLOY; min. 200pin TIN over 80pin NICKEL
8. FIXING-PLATE: PBT GF UL 94 V-0, BLACK
9. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16V1IH5B
10. CAPACITANCE: 830pF $\pm 20\%$
11. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
12. MAXIMUM TORQUE VALUE FOR THREAD: 6in.LB
13. CONNECTOR IS PART MARKED: [PART-NO. CONEC ABC]

Directive 2002/95/EC
"RoHS"
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
2 x b	Ä 2959	26.03.08	Lehmen
a	Origin		

tolerance	dim. in mm
2004	date
drawn	18.02. Lehmenkübler
appd.	18.02. Mickenbecker
norm	DIN 41652
d-old	





CONEC

scale:	2:1 (5:1)
material:	SEE NOTES
title:	D-SUB HD FILTER MALE 90° 15-26pos. 0.350inch with threaded insert, metal bracket, ferrite
dwg no:	AutoCAD 2000
part no:	SEE TABLE

24K1A511

DIN-A
3(b)
sh:1/2

used for: D-SUB HD FILTER

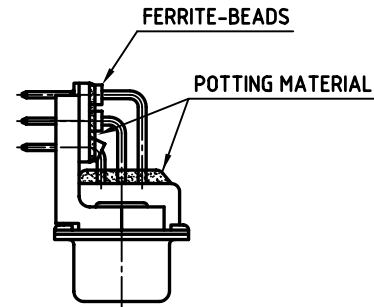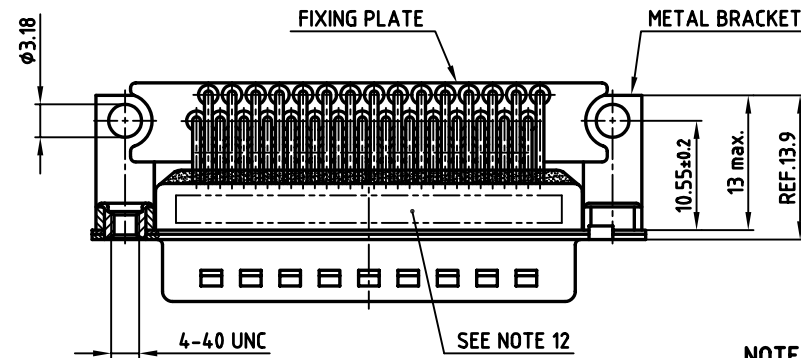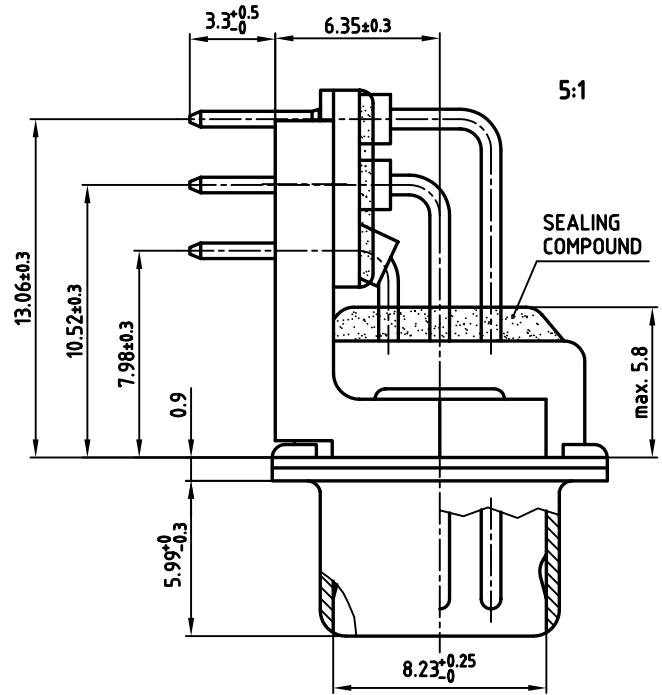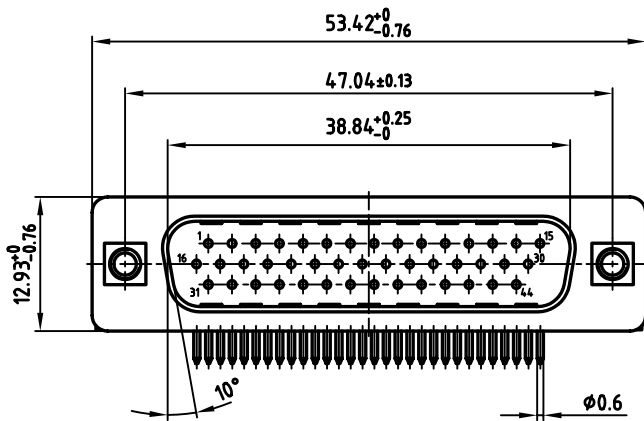


NOTES:

1. RoHS COMPLIANT
2. SUITABLE FOR WAVE SOLDERING
3. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0;BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD OVER min. 50µinNICKEL
6. METAL BRACKET: ZINC DIE CAST; 300µin COPPER
40-120µin NICKEL/120-200µin TIN
7. THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
8. FIXING-PLATE: PBT GF UL 94 V-0, BLACK
9. CAPACITANCE: 830pF ±20%
10. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
11. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
12. CONNECTOR IS PART MARKED: 241A25780X CONEC ABC

Directive 2002/95/EC
„RoHS“
Compliant

P.C.B. HOLE DRILLINGS

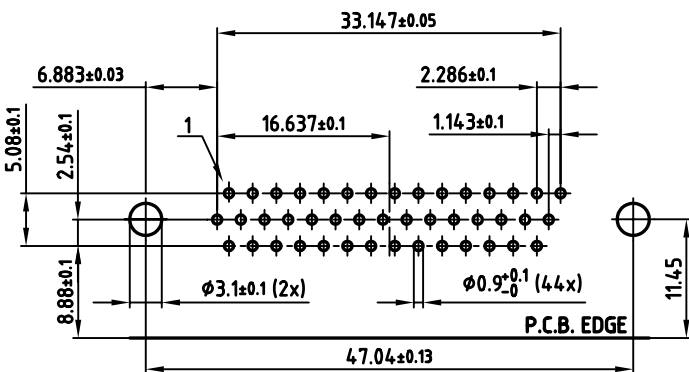

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL

CUSTOMER APPROVAL DATE:

NAME:

TITLE:

COMPANY NAME:

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC Gmbh
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance



scale:

2:1 (5:1)

material:

SEE NOTES

title:

D-SUB HD FILTER MALE 90°

44pos. 0.350inch

threaded insert, metal bracket, ferrite-beads

dwg no:

AutoCAD 2006

DIN-A

24K1A511

3

sh:2/2

part no:

241A25780X