



used for:	D-SUB π FILTER
-----------	--------------------

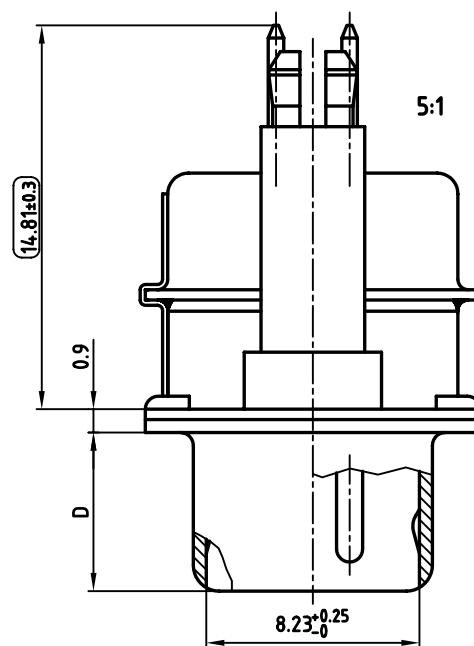

1. METAL SHELLS: STEEL; min. 320μ" TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
PLATING: 8μ" HARD GOLD OVER min. 50μ" NICKEL
4. THREADED SPACER CLIP: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
5. COLLAR: COPPER ALLOY; min. 200μ" TIN over 80μ" NICKEL
6. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K11IUA
7. CAPACITANCE: $2 \times 180\text{pF} \pm 20\%$
8. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. CONNECTOR IS PART MARKED: PART-NO. CONEC ABC
11. = CHECK DIMENSION

APPROVAL	FREIGABE	DEBLOCKAGE	AUTORIZACION	APPROVAL
CUSTOMER APPROVAL DATE:				
NAME:		TITLE:		
COMPANY NAME:				
APPROVAL	FREIGABE	DEBLOCKAGE	AUTORIZACION	APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance



scale:	2:1 (5:1)
material:	SEE NOTE

title:	D-SUB π FILTER MALE 9-37pos. SOLDER PIN STRAIGHT with threaded spacer clip
--------	--

dwg no:	AutoCAD 2004	DIN-A
---------	--------------	-------



part no: SEE TABLE