



Π-FILTER D-SUB STANDARD

Solder pin – Straight – Precision machined contacts

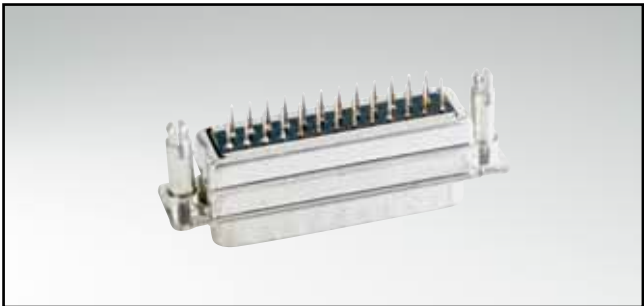

RoHS compliant – CSA listed, File No.: LR 115000-1 – UL listed, File No.: E202784


SOCKET CONNECTOR



No. of pos.	A -0.76	B -0.25	C
09	31.19	16.46	25.00 ^{+0.12} / _{-0.13}
15	39.52	24.79	33.30 ^{+0.15} / _{-0.10}
25	53.42	38.50	47.04 ^{+0.13} / _{-0.13}
37	69.70	54.96	63.50 ^{+0.13} / _{-0.13}

PCB layout: Kat1kFUA


Mounting style: Threaded rear spacer with PCB clip

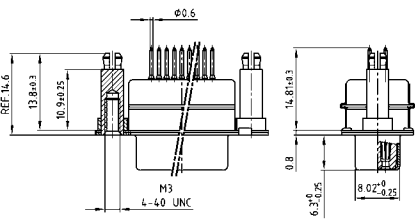

DESCRIPTION

- Mounting style:
with 4-40 UNC or M3 threaded rear spacer with PCB clip
- Quality class 3 (also available in quality class 1)
- Shell: Steel tin plated (brass tin plated on request)


PLUG CONNECTOR



No. of pos.	A -0.76	B +0.25	C	D -0.3
09	31.19	16.79	25.00 ^{+0.12} / _{-0.13}	6.12
15	39.52	25.12	33.30 ^{+0.15} / _{-0.10}	6.12
25	53.42	38.84	47.04 ^{+0.13} / _{-0.13}	5.99
37	69.70	55.30	63.50 ^{+0.13} / _{-0.13}	5.99

PCB layout: Kat1kFUA

Mounting style: Threaded rear spacer with PCB clip

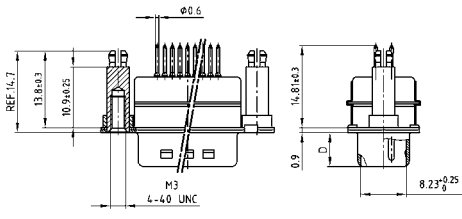

ORDER DATA

Capacitance 2 x 180 pF

SOCKET CONNECTOR			PLUG CONNECTOR		
No. of pos.	Mounting style	Part Number	No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer PCB clip	242 A 26260 X	09	4-40 UNC Threaded rear spacer PCB clip	241 A 26360 X
15	4-40 UNC Threaded rear spacer PCB clip	242 A 26270 X	15	4-40 UNC Threaded rear spacer PCB clip	241 A 26370 X
25	4-40 UNC Threaded rear spacer PCB clip	242 A 26280 X	25	4-40 UNC Threaded rear spacer PCB clip	241 A 26380 X
37	4-40 UNC Threaded rear spacer PCB clip	242 A 26290 X	37	4-40 UNC Threaded rear spacer PCB clip	241 A 26390 X
09	M3 Threaded rear spacer PCB clip	242 A 26420 X	09	M3 Threaded rear spacer PCB clip	241 A 26520 X
15	M3 Threaded rear spacer PCB clip	242 A 26430 X	15	M3 Threaded rear spacer PCB clip	241 A 26530 X
25	M3 Threaded rear spacer PCB clip	242 A 26440 X	25	M3 Threaded rear spacer PCB clip	241 A 26540 X
37	M3 Threaded rear spacer PCB clip	242 A 26450 X	37	M3 Threaded rear spacer PCB clip	241 A 26550 X

PCB clip .122" / 3.1 ± .004" / 0.10 mm hole diameter and .063" / 1.6 mm circuit board thickness

π -FILTER D-SUB STANDARD

Solder pin – Straight – Precision machined contacts

ORDER DATA

Capacitance 2 x 370 pF

SOCKET CONNECTOR			PLUG CONNECTOR		
No. of pos.	Mounting style	Part Number	No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer PCB clip	242 A 26300 X	09	4-40 UNC Threaded rear spacer PCB clip	241 A 26400 X
15	4-40 UNC Threaded rear spacer PCB clip	242 A 26310 X	15	4-40 UNC Threaded rear spacer PCB clip	241 A 26410 X
25	4-40 UNC Threaded rear spacer PCB clip	242 A 26320 X	25	4-40 UNC Threaded rear spacer PCB clip	241 A 26420 X
37	4-40 UNC Threaded rear spacer PCB clip	242 A 26330 X	37	4-40 UNC Threaded rear spacer PCB clip	241 A 26430 X
09	M3 Threaded rear spacer PCB clip	242 A 26460 X	09	M3 Threaded rear spacer PCB clip	241 A 26560 X
15	M3 Threaded rear spacer PCB clip	242 A 26470 X	15	M3 Threaded rear spacer PCB clip	241 A 26570 X
25	M3 Threaded rear spacer PCB clip	242 A 26480 X	25	M3 Threaded rear spacer PCB clip	241 A 26580 X
37	M3 Threaded rear spacer PCB clip	242 A 26490 X	37	M3 Threaded rear spacer PCB clip	241 A 26590 X

Capacitance 2 x 830 pF

SOCKET CONNECTOR			PLUG CONNECTOR		
No. of pos.	Mounting style	Part Number	No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer PCB clip	242 A 26340 X	09	4-40 UNC Threaded rear spacer PCB clip	241 A 26440 X
15	4-40 UNC Threaded rear spacer PCB clip	242 A 26350 X	15	4-40 UNC Threaded rear spacer PCB clip	241 A 26450 X
25	4-40 UNC Threaded rear spacer PCB clip	242 A 26360 X	25	4-40 UNC Threaded rear spacer PCB clip	241 A 26460 X
37	4-40 UNC Threaded rear spacer PCB clip	242 A 26370 X	37	4-40 UNC Threaded rear spacer PCB clip	241 A 26470 X
09	M3 Threaded rear spacer PCB clip	242 A 26500 X	09	M3 Threaded rear spacer PCB clip	241 A 26600 X
15	M3 Threaded rear spacer PCB clip	242 A 26510 X	15	M3 Threaded rear spacer PCB clip	241 A 26610 X
25	M3 Threaded rear spacer PCB clip	242 A 26520 X	25	M3 Threaded rear spacer PCB clip	241 A 26620 X
37	M3 Threaded rear spacer PCB clip	242 A 26530 X	37	M3 Threaded rear spacer PCB clip	241 A 26630 X

Capacitance 2 x 1300 pF

SOCKET CONNECTOR			PLUG CONNECTOR		
No. of pos.	Mounting style	Part Number	No. of pos.	Mounting style	Part Number
09	4-40 UNC Threaded rear spacer PCB clip	242 A 26380 X	09	4-40 UNC Threaded rear spacer PCB clip	241 A 26480 X
15	4-40 UNC Threaded rear spacer PCB clip	242 A 26390 X	15	4-40 UNC Threaded rear spacer PCB clip	241 A 26490 X
25	4-40 UNC Threaded rear spacer PCB clip	242 A 26400 X	25	4-40 UNC Threaded rear spacer PCB clip	241 A 26500 X
37	4-40 UNC Threaded rear spacer PCB clip	242 A 26410 X	37	4-40 UNC Threaded rear spacer PCB clip	241 A 26510 X
09	M3 Threaded rear spacer PCB clip	242 A 26540 X	09	M3 Threaded rear spacer PCB clip	241 A 26640 X
15	M3 Threaded rear spacer PCB clip	242 A 26550 X	15	M3 Threaded rear spacer PCB clip	241 A 26650 X
25	M3 Threaded rear spacer PCB clip	242 A 26560 X	25	M3 Threaded rear spacer PCB clip	241 A 26660 X
37	M3 Threaded rear spacer PCB clip	242 A 26570 X	37	M3 Threaded rear spacer PCB clip	241 A 26670 X

PCB clip .122" / 3.1 ± .004" / 0.10 mm hole diameter and .063" / 1.6 mm circuit board thickness