
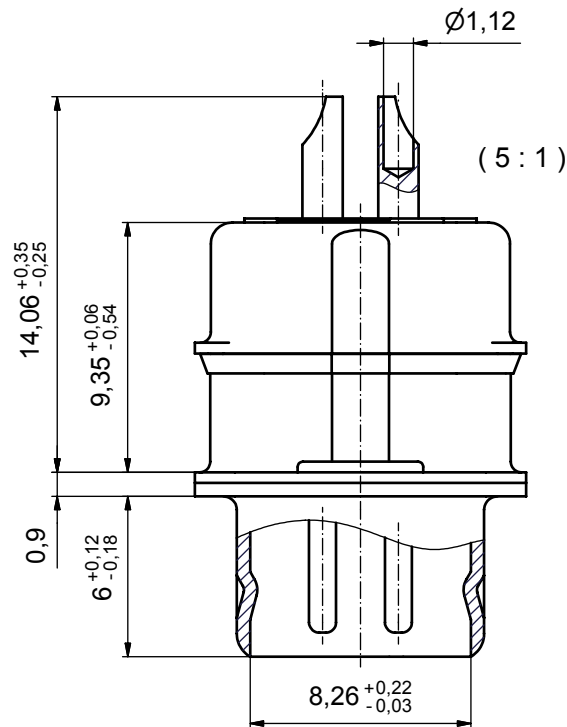
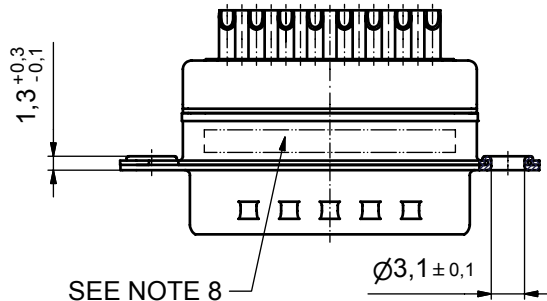
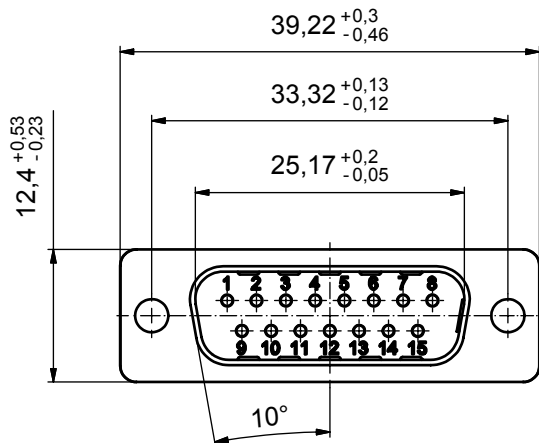


NOTES:

1. RoHS COMPLIANT
2. SUITABLE FOR WAVE SOLDERING
3. METALSHELLS: STEEL; min. 315µm TIN over 40-80µm NICKEL
4. INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
5. CONTACTS: COPPER ALLOY
PLATING: 8µm HARD GOLD over min. 50µm NICKEL
SOLDER CUP ACCEPTS CABLE AWG 20
6. CAPACITANCE: 2 x 180pF ±20%
7. DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
8. CONNECTOR IS PART MARKED: 241A29090X CONEC ABC

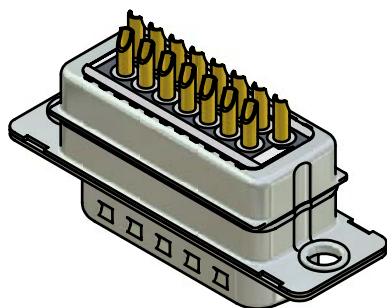

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

finish:			
SEE NOTES			
rev.	description	date	name
a	Origin		

tolerance	
dim. in mm	
drawn	14.12.06 Lehmenkühler
appd.	14.12.06 Mickenbecker
norm	DIN 41652
d-old	

scale:	2:1 (5:1)		
material:	SEE NOTES		
title:			
D-SUB PI FILTER MALE			
15pos. SOLDER CUP			
dwg no:		Inventor	DIN-
24K1A959			A3
			sh: 1
part no:		241A29090X	

CONEC