

4

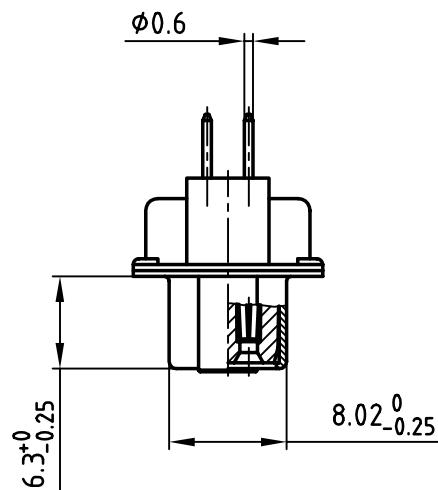
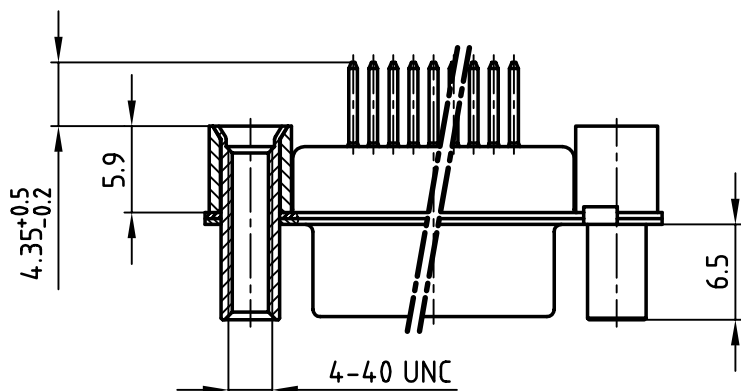
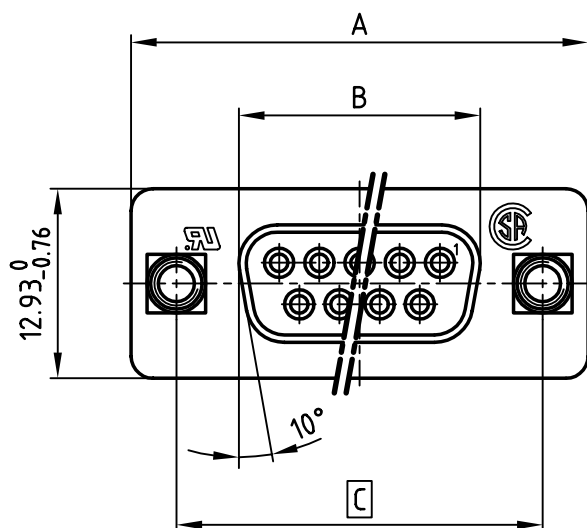
3

2

1

used for: D-SUB FILTER

POS.	A -0.76	B -0.25	C	Part NO.
9	31.19	16.46	25.00 $+0.12$ -0.13	242A10690X
15	39.52	24.79	33.30 $+0.15$ -0.1	242A10700X
25	53.42	38.50	47.04 ± 0.13	242A10710X
37	69.70	54.96	63.50 ± 0.13	242A10720X

**NOTES:**

1. METAL SHELLS: STEEL; min. 320 μ " TIN
2. INSULATORS: PBT GF UL 94 V-0, BLACK
3. CONTACTS: COPPER ALLOY
4. PLATING: min. 8 μ " HARD GOLD OVER min. 50 μ " NICKEL
5. THREADED REAR SPACER: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
6. FRONT THREADED LOCK: COPPER ALLOY; min. 200 μ " TIN over 80 μ " NICKEL
7. P.C.B. HOLE DRILLINGS ON DRAWING NO.: 16K111UA
8. CAPACITANCE: 830pF $\pm 20\%$
9. MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
10. = CRITICAL DIMENSION: SPC

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

CONEC CORPORATION
BRAMPTON, ONTARIO

tolerance



scale:

2:1

material:

SEE NOTES

title:

D-SUB FILTER FEMALE

9-37pos. SOLDER PIN STRAIGHT

threaded rear spacer and front threaded lock

dwg no:

AutoCAD 2000

DIN-A

24K1A211A

4

sh: 1/1

part no:

SEE TABLE

rev.	description	date	name
2002	date	name	
drawn	29.01.	Parei	
appd.	30.01.	E. Mickenbecker	
norm	DIN 41652		
d-old			

CONEC[®]

4

3

2

1