

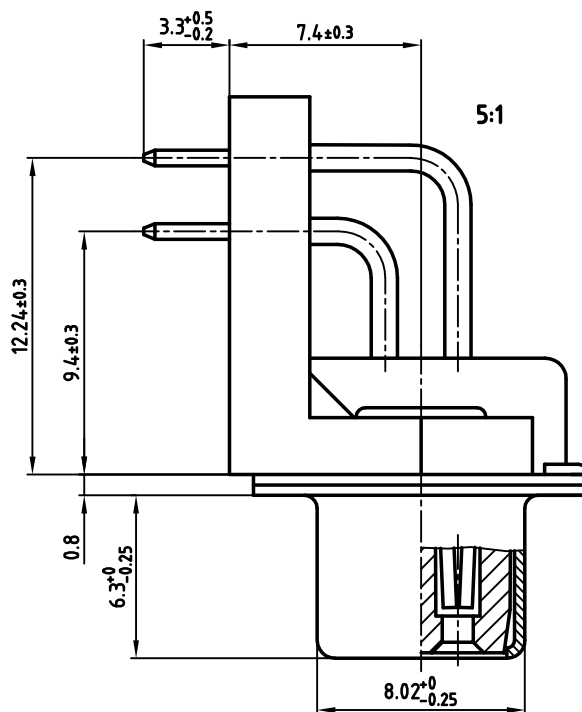
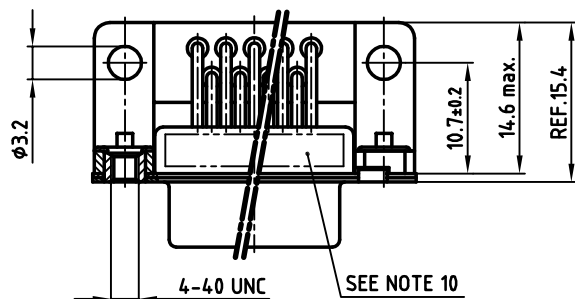


No. of pos.	A ^{-0.76}	B ^{-0.25}	C ^{+0.12 -0.13}	Part NO.
9	31.19	16.46	25.00	242A11170X
15	39.52	24.79	33.30	242A11180X
25	53.42	38.50	47.04	242A11190X
37	69.70	54.96	63.50	242A11200X

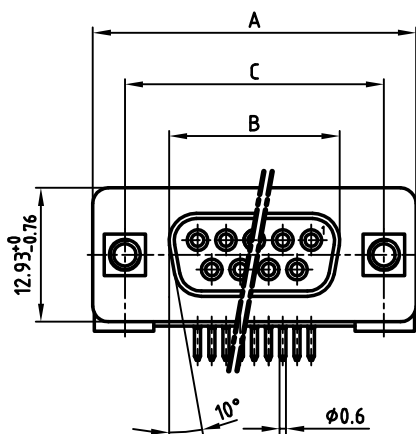

NOTES:

- METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
- INSULATORS: HIGH TEMPERATURE PLASTIC UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD OVER min. 50µin NICKEL
- MOUNTING BRACKET: PBT UL 94 V-0, BLACK
- THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- P.C.B. HOLE DRILLINGS ON SHEET 2
- CAPACITANCE: 830pF ±20%
- DIELECTRIC WITHSTANDING VOLTAGE: 424VDC
- MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
- CONNECTOR IS PART MARKED: PART-NO. CONEC ABC

Directive 2002/95/EC
„RoHS“
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND


rev.	description	date	name
a	Origin		

tolerance	dim. in mm
2006	date
drawn	30.11.
appd.	30.11.
norm	DIN 41652
d-old	


scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB FILTER FEMALE 90°	
9-37pos.	
thread insert, mounting bracket	
dwg no:	AutoCAD 2006
24K1A951	
part no:	SEE TABLE

DIN-A
3
sh:1/2

9 pos.

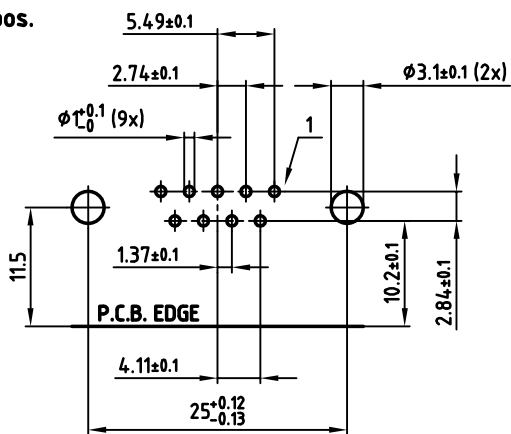


25 pos.

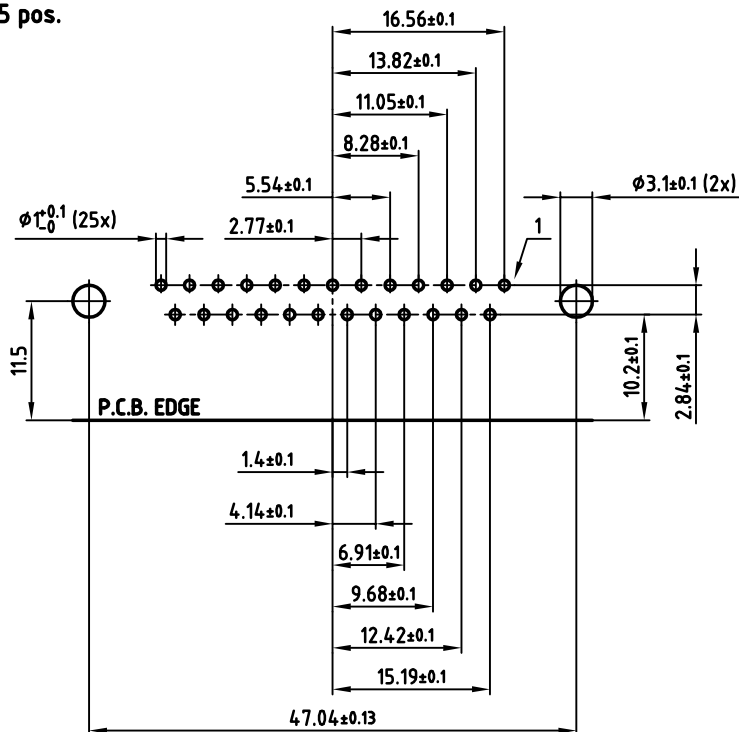


used for: D-SUB FILTER

15 pos.

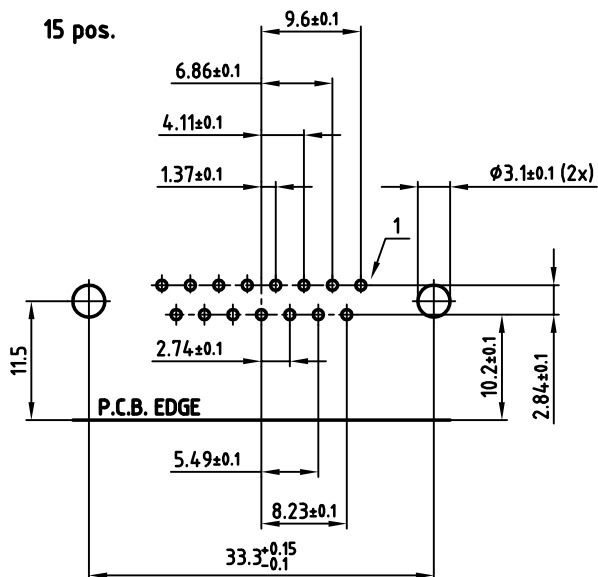

37 pos.

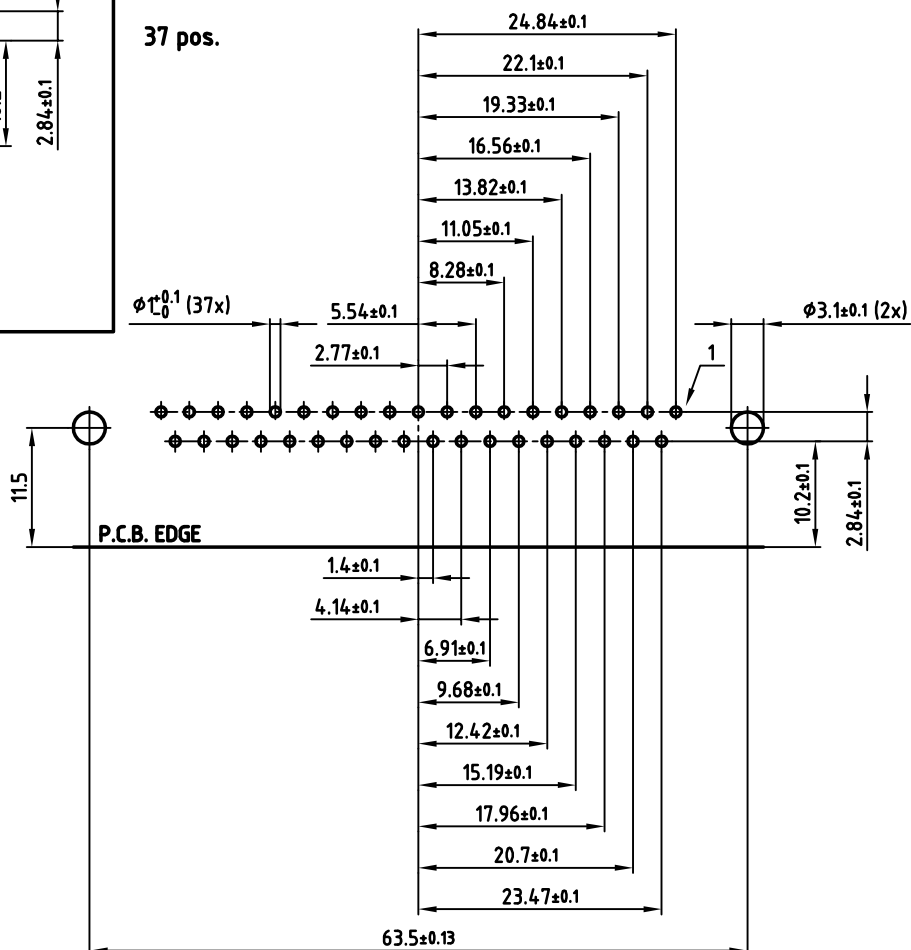

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME:

TITLE:

COMPANY NAME:

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
a	Origin		

tolerance



dim. in mm

2006	date	name
drawn	30.11.	Schwenkler
appd.	30.11.	Lehmenkühler
norm	DIN 41652	
d-old		

CONEC

scale:

2:1

material:

SEE SHEET 1

title:

P.C.B. HOLE DRILLINGS
D-SUB FILTER FEMALE 90° 9-37pos.
thread insert, mounting bracket

dwg no:

AutoCAD 2006

DIN-A

24K1A951

3

sh:2/2

part no:

SEE SHEET 1