

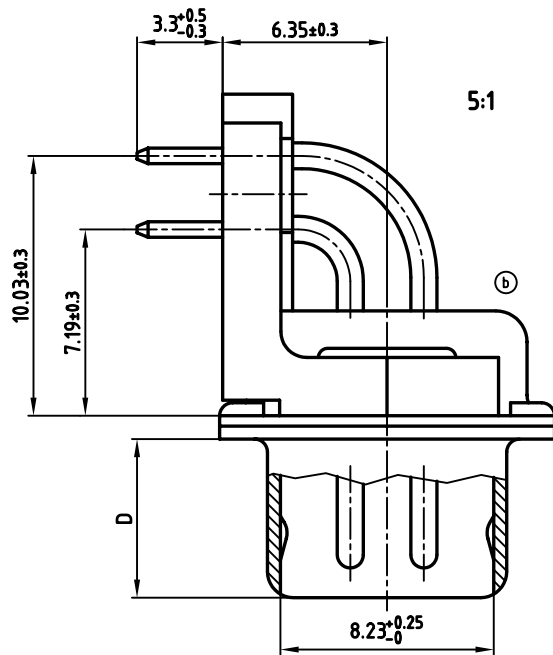
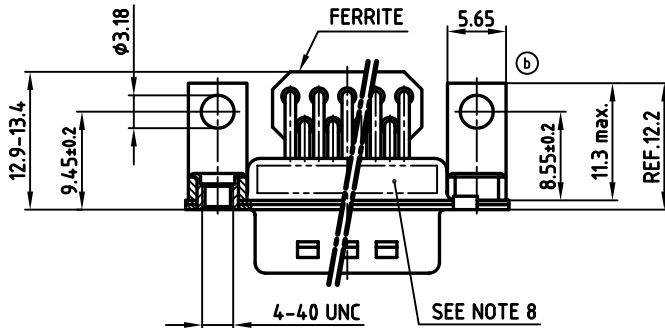


No. of pos.	A -0.76	B +0.25	C	D -0.3	Part No.
9	31.19	16.79	25.00 ^{+0.12} _{-0.13}	6.12	241A24880X
15	39.52	25.12	33.30 ^{+0.15} _{-0.1}	6.12	241A24890X
25	53.42	38.84	47.04 ^{+0.13} _{-0.1}	5.99	241A24900X
37	69.70	55.30	63.50 ^{+0.13} _{-0.1}	5.99	241A24910X

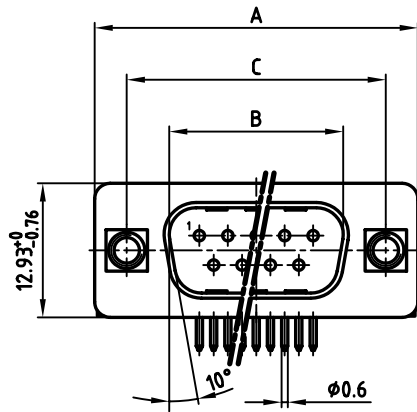

NOTES:

- METALSHELLS: COPPER ALLOY; min. 320µin TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
- METAL BRACKET: DIE CASTING; min. 320µin TIN over 80µin NICKEL
- THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6in. LBS
- CONNECTOR IS PART MARKED: **PART-NO. CONEC ABC**

Directive 2002/95/EC
RoHS
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	


THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
3x b	Ä3061	25.07.2008	Sonne
a	Origin		


tolerance	dim. in mm
2004	date
drawn	02.08. Lehmenkühler
appd.	02.08. Kühle
norm	DIN 41652
d-old	

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB FILTER MALE 90°	
9-37pos. 0.318inch	
with threaded insert, metal bracket and ferrite	
dwg no:	AutoCAD 2004 DIN-A
24K1A549	
part no:	SEE TABLE


9 pos.

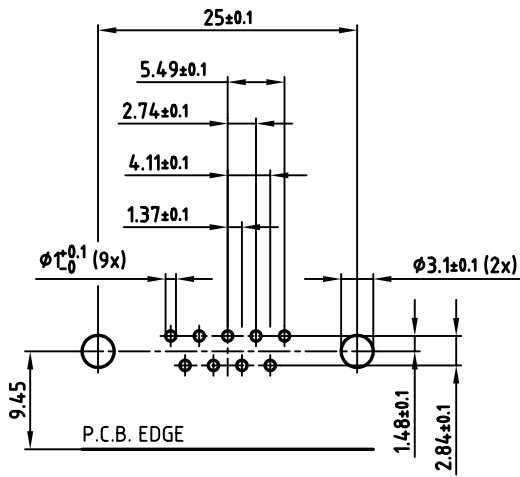


25 pos.

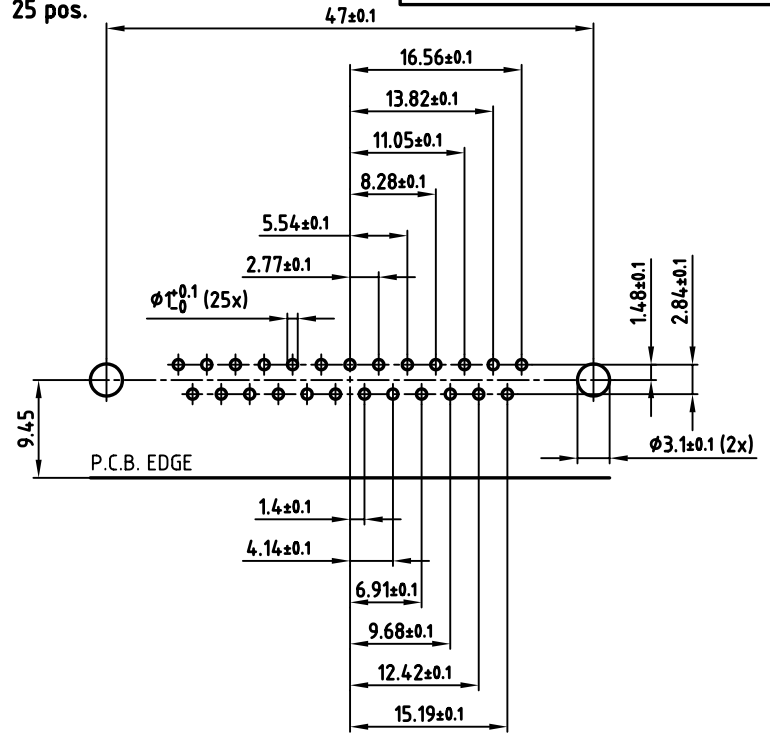

15 pos.

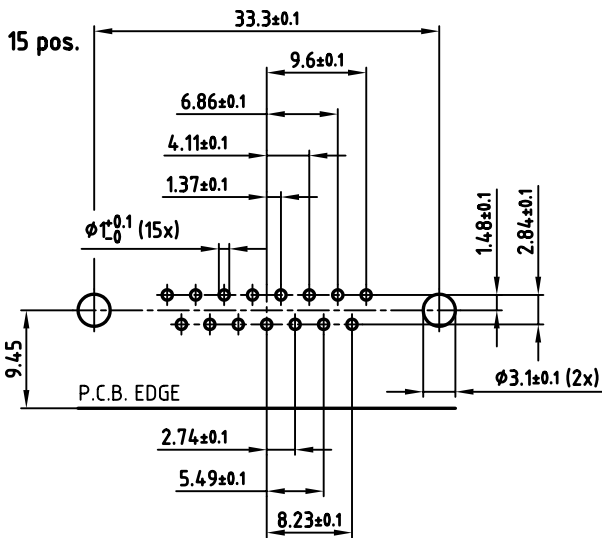

37 pos.

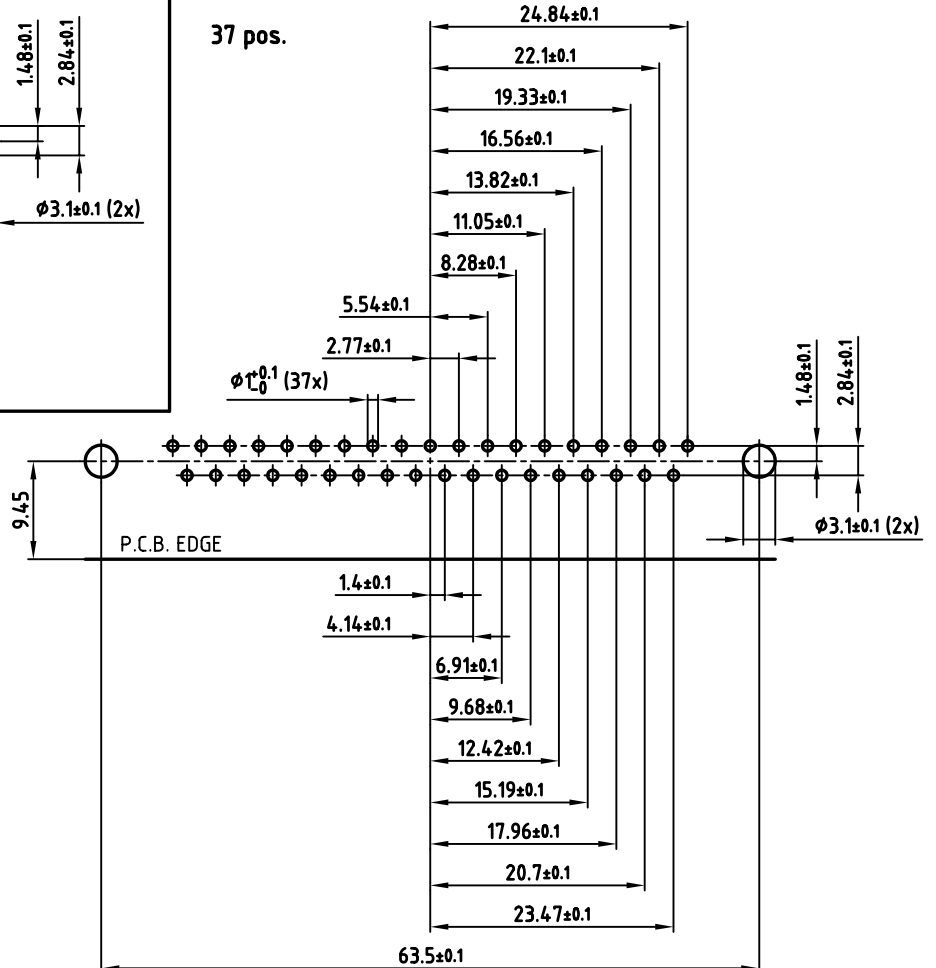

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name

tolerance		dim. in mm
2004	date	
drawn	02.08.	name
appd.	02.08.	Kühle
norm	DIN 41652	
d-old		

scale:	2:1
material:	SEE SHEET 1
P.C.B. HOLE DRILLINGS D-SUB FILTER MALE 90° 9-37pos. 0.318inch with threaded insert, metal bracket and ferrite	
dwg no:	AutoCAD 2004
24K1A549	
part no:	SEE SHEET 1