


Product Area Female angled connector moulded, with LED PNP normally closed/ open, antivalent M12 connectors A-Coding serie 763

Pole 4
Article number 79 3436 13 04


illustration



scale drawing

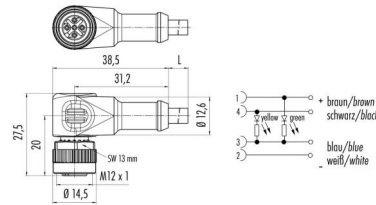

Contact Arrangement

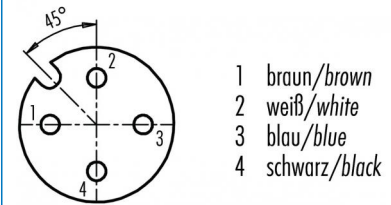

Technical data

Common values

Connector Design	Female angled cable connector
Connector locking system	Screw
Termination	crimp, overmoulded on cable
Wire gauge (mm)	0,34 mm ²
Wire gauge (AWG)	22
Upper temperature	+85 °C
Lower temperature	-25 °C

Electrical values

Rated voltage	36 V
Rated impulse voltage	500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 68
Mechanical operation	>100 mating cycles

Material

Material of contact	CuSn (bronze)
Contact plating	Au (gold)
Material of contact body	PUR
Material of housing	PUR

Cable data

material housing	PVC
insulation single lead	PVC
single lead structure	7 x 0,25
cable sheath Ø	5
conductor resistance	79,9Ω/Km
temperature range cable movable c from	-5
temperature range cable movable c to	70
temperature range cable fixed c from	-25
temperature range cable fixed c to	70

Contacts 4: Cable lenght 2 m, cable 4 x 0,34 PVC, female angled connector moulded, with LED PNP normally open/ closed, antivalent

