

Product Area Male socket, front fastened
M 23 connectors IP 67


serie 623

Pole 12
Article number 99 4607 00 12

illustration



scale drawing

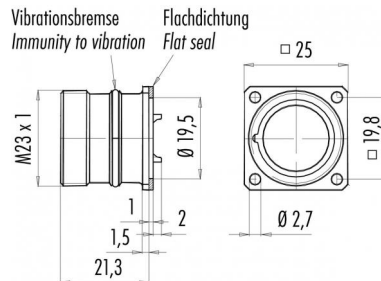

Contact Arrangement

	X	Y		X	Y	
	1	3,60	4,30	1	-3,60	4,30
	2	5,55	1,00	2	-5,55	1,00
	3	4,90	-2,80	3	-4,90	-2,80
	4	1,90	-5,30	4	-1,90	-5,30
	5	1,90	5,30	5	1,90	5,30
	6	4,90	2,80	6	4,90	2,80
	7	-5,55	1,00	7	5,55	1,00
	8	-3,60	4,30	8	3,60	4,30
	9	0,00	4,50	9	0,00	4,50
	10	1,90	1,00	10	-1,90	1,00
	11	0,00	-2,20	11	0,00	-2,20
	12	-1,90	1,00	12	1,90	1,00

Bei rechts- und linksdrehenden Ausführungen sind Stift- und Buchsenleisten gegenläufig.
The marking of the clockwise and anticlockwise male and female contacts goes in the opposite direction.

Technical data

Common values

Connector Design	Male socket
Connector locking system	Screw
Termination	solder
Wire gauge (mm)	1,00 mm ²
Wire gauge (AWG)	18
Cable outlet	-
Upper temperature	+125 °C
Lower temperature	-20 °C

Material

Material of contact	CuSn (bronze)
Contact plating	Au (gold)
Material of housing	zinc diecasting, nickel plated

Cable data

Contacts 12, male socket, front fastened, clockwise

Electrical values

Rated voltage	150 V
Rated impulse voltage	1500 V
Pollution degree	3
Overvoltage category	II
Material group	III
Rated current (40°C)	8 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP 67
Mechanical operation	> 50 mating cycles

