




DASH NO.	M CODE	MADE FROM
----------	--------	-----------

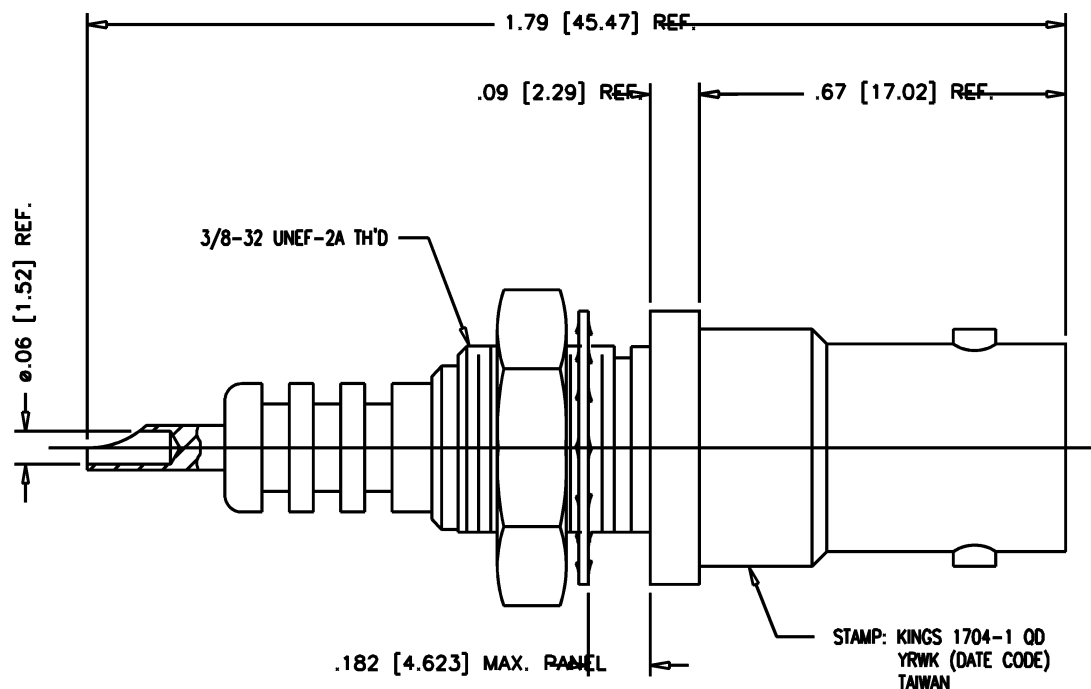

NOTES:

1. INTERFACE PER MIL-STD-348, FIG. 314-1.
2. MATERIALS:
INSULATOR: TEFLON, ASTM-D-4894
LOCKWASHER: PHOSPHOR BRONZE, ASTM-B-103
ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:
CENTER CONTACT: GOLD PLATE PER ASTM-B488
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
4. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: NON-CONSTANT
VOLTAGE RATING: 3500 VRMS
5000 VDC
5. DIMENSIONS ARE IN INCHES [MM].

GSD

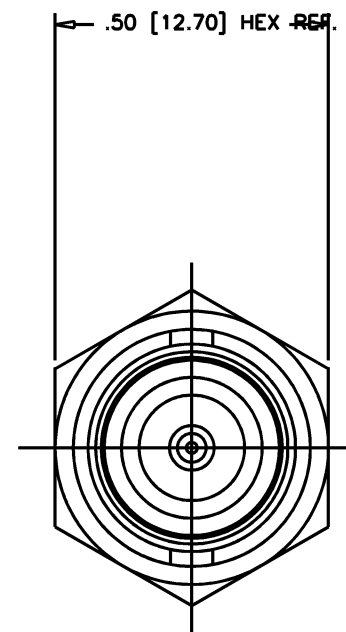

MOUNTING HOLE

GSD

1704-1 QD

REVISIONS	
ISSUE	CHANGES
6	CN 39718 C HVN 11/29/06
1704-1 QD S	
SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
RECEPTACLE, BULKHEAD, SHV, F	
DRAWN H. NGUYEN	DATE 11/29/06
DESIGN LJ	DATE 11/10/92
APPR.	DATE
 KINGS ELECTRONICS CO., INC. ROCK HILL, SOUTH CAROLINA 29730	
1704-1 QD	