
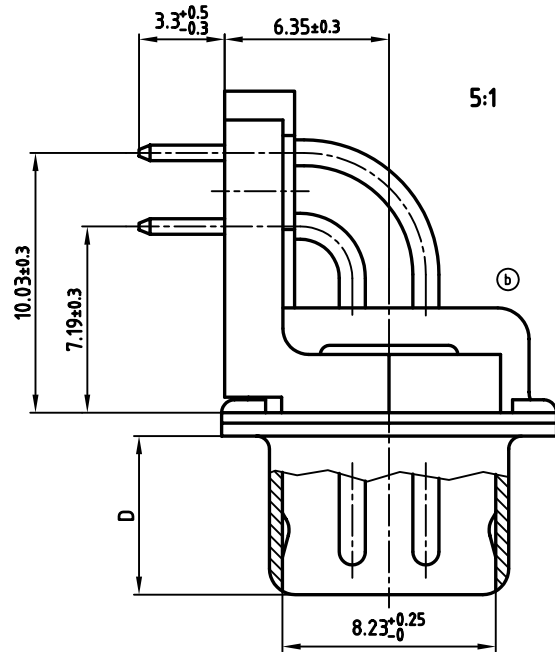
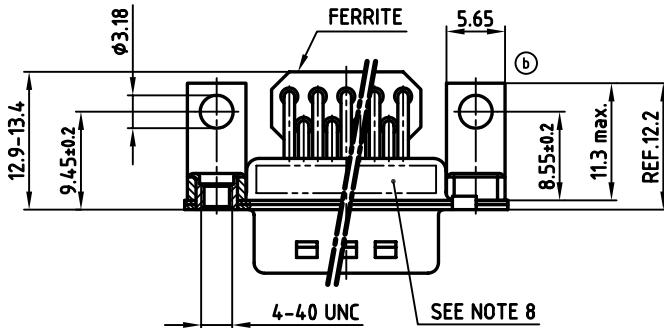


No. of pos.	A -0.76	B +0.25	C	D -0.3	Part No.
9	31.19	16.79	25.00 ^{+0.12} _{-0.13}	6.12	241A24880X
15	39.52	25.12	33.30 ^{+0.15} _{-0.1}	6.12	241A24890X
25	53.42	38.84	47.04 ^{+0.13} _{-0.1}	5.99	241A24900X
37	69.70	55.30	63.50 ^{+0.13} _{-0.1}	5.99	241A24910X

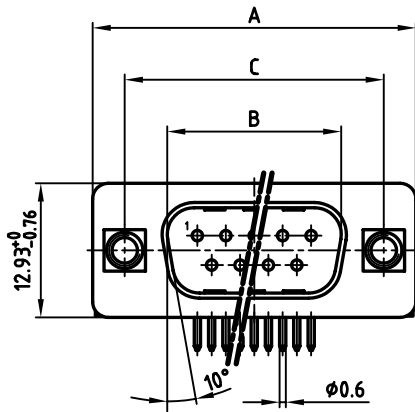

NOTES:

- METALSHELLS: COPPER ALLOY; min. 320µin TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: 8µin HARD GOLD over min. 50µin NICKEL
- METAL BRACKET: DIE CASTING; min. 320µin TIN over 80µin NICKEL
- THREADED INSERT: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
- P.C.B. HOLE DRILLINGS ON SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6in. LBS
- CONNECTOR IS PART MARKED: **PART-NO. CONEC ABC**

Directive 2002/95/EC
RoHS
Compliant

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL	


THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
3x b	Ä3061	25.07.2008	Sonne
a	Origin		


tolerance	dim. in mm
2004	date
drawn	02.08. Lehmenkühler
appd.	02.08. Kühle
norm	DIN 41652
d-old	

scale:	2:1 (5:1)
material:	SEE NOTES
title:	
D-SUB FILTER MALE 90°	
9-37pos. 0.318inch	
with threaded insert, metal bracket and ferrite	
dwg no:	AutoCAD 2004
DIN-A	
24K1A549	
3	
sh:1/2	
part no:	SEE TABLE


9 pos.

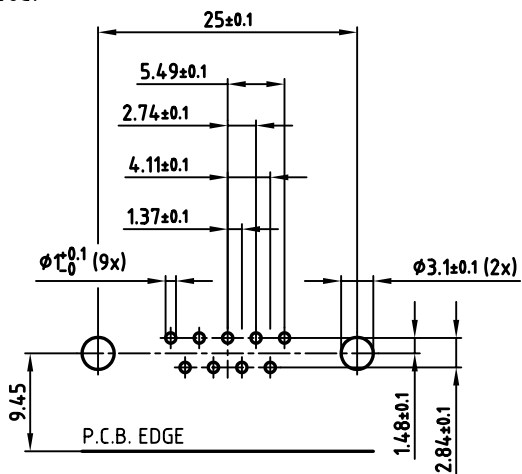


15 pos.

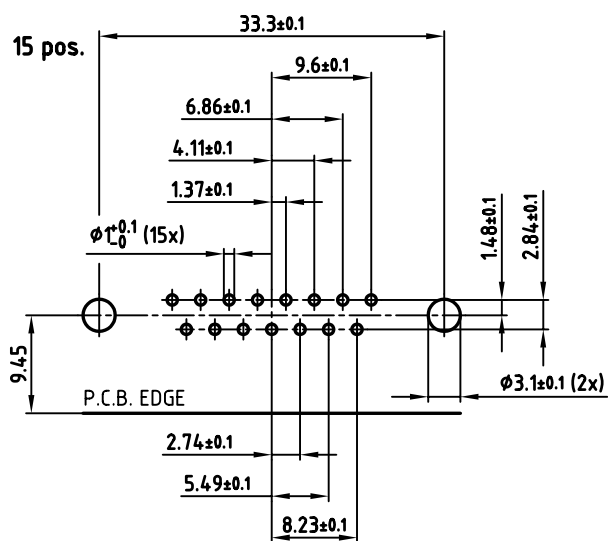

25 pos.

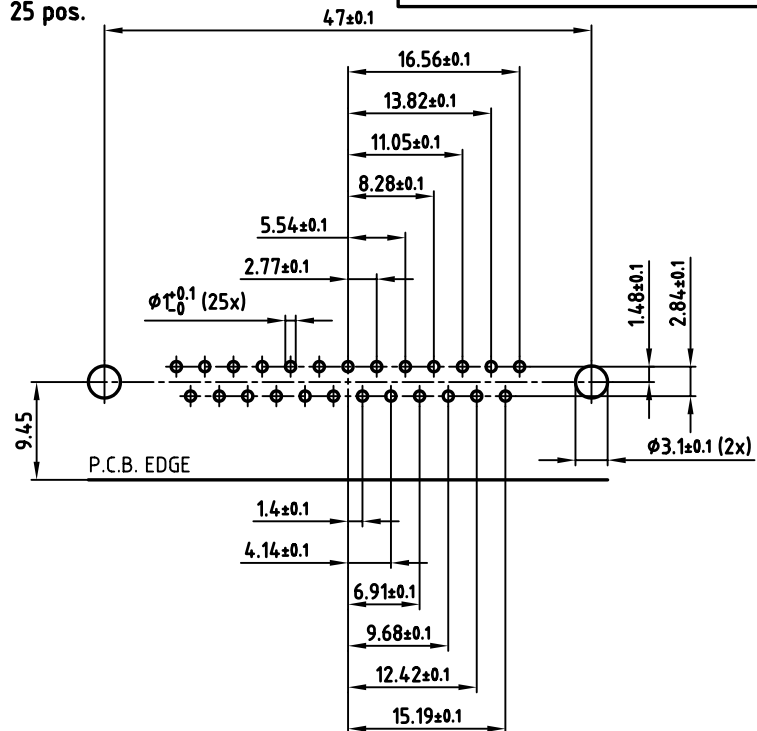

37 pos.

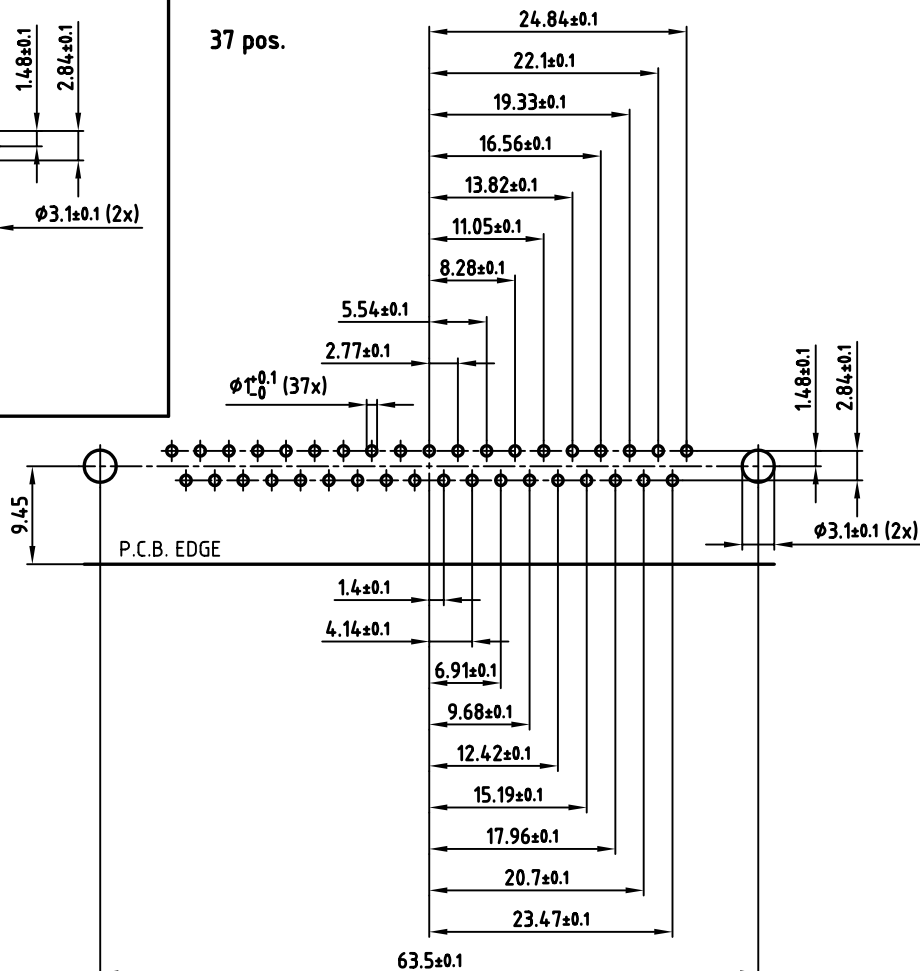

used for: D-SUB FILTER

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL

CUSTOMER APPROVAL DATE:

NAME:

TITLE:

COMPANY NAME:

APPROVAL * FREIGABE * DEBLOCAGE * AUTORIZACION * APPROVAL

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY, WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH
DO NOT ALTER CAD DRAWING BY HAND

tolerance

scale: 2:1
material: SEE SHEET 1

2004	date	name
drawn	02.08.	Lehmenkübler
appd.	02.08.	Kühle
norm	DIN 41652	
d-old		

CONEC
rev. description date name

title:
P.C.B. HOLE DRILLINGS
D-SUB FILTER MALE 90° 9-37pos. 0.318inch
with threaded insert, metal bracket and ferrite

dwg no: AutoCAD 2004 DIN-A
3 sh:2/2

part no: SEE SHEET 1